



JUSTRITE®

THE WORLD'S MOST WIDELY TRUSTED SAFETY CONTAINMENT SYSTEMS



NEW
EN SAFETY
STORAGE CABINETS



NEW
OUTDOOR
SAFETY LOCKERS



NEW
FLEXIBLE SPILL
CONTAINMENT



GLOBAL SAFETY SOLUTIONS
— ENGLISH



justritemfg.com



The World's Most Widely Trusted Safety Containment Systems

contents

3-13 SAFETY CANS & CONTAINERS

14-15 SMOKING RECEPTACLES

16-18 DRUM FUNNELS & EQUIPMENT

19-41 SPILL CONTROL & ENVIRONMENTAL

42-60 SAFETY & STORAGE CABINETS

61-62 OUTDOOR SAFETY LOCKERS

Since 1906 customers have relied on Justrite for solutions to help protect workers and the environment, reduce fire risks, and improve productivity. We're committed to providing you product offerings in sync with evolving industry demands. Our comprehensive line includes products for handling and managing flammable liquids, such as code compliant safety cabinets and containers, smoking receptacles, drum handling equipment, and environmental spill containment products.

justritemfg.com

Visit our website for our newest products, helpful information on our entire line of safety containment systems, plus expert advice on the safe management of flammable liquids.

Explanations of table info in this catalog

Approval and Compliance Key

FM	Tested and approved by FM Approvals
UL/ULC	Underwriters Laboratories listed in the U.S. and Canada
TÜV	TÜV Technical Inspection Association certified
N	Complies with National Fire Protection Association (NFPA) Flammable and Combustible Liquids Code 30
O	Complies with Occupational Safety and Health Administration (OSHA) Regulations
I	Complies with the International Fire Code (IFC)
A	Complies with NFPA 1 Fire Code - 2012 Edition
A9	Complies with NFPA 1 Fire Code - 2009 Edition
H	Complies with NFPA 400 Hazardous Material Code
EN	Complies with European standards EN 14470-1 and EN 14727
E	Complies with Environmental Protection Agency (EPA) Regulations
S	Supports EPA Spill Prevention, Control and Countermeasures Rule (SPCC)
V	Validated by the EPA Environmental Technology Verification Program

NEW We've doubled our spill control line! See pages 19-28 for our new flexible spill containment products.

NEW Check out our new safety cabinet and outdoor safety locker offerings! See pages 47-50, 54-55, and 61-62.



Our products are specifically engineered to promote workplace safety and efficiency making your job easier. We thoroughly test our products for excellent quality, reliability, and compliance to applicable codes and regulations. Their durability and our confidence in these products are backed by industry's strongest warranties—see inside back cover for details.

15 Year
Structural Warranty

10 Year
Limited Warranty

5 Year
Limited Warranty

1 Year
Limited Warranty

Safety Storage Cabinets

Model numbers ending with the number "1" represent a cabinet that is shipped on a pallet which meets the International Standards for Phytosanitary Measures (ISPM 15). Each cabinet includes a multilingual label package with warning labels in 21 languages. For shipments within the United States which include a standard wood pallet without the label pack, delete the number "1" at the end of the model number.

Safety Cans and Containers

Model numbers ending with the letter "Z" represent products that include multilingual warning labels and instruction sheets in 22 languages. For products shipped within the United States that do not include the 22 language pack, delete the letter "Z" at the end of the model number.



Exclusive, vented Type II AccuFlow™ manifold with a Safe Squeeze® trigger handle provides the fastest smoothest, most controlled pouring. Patented.



Flexible 9-in (229-mm) hose on Type II AccuFlow™ offers targeted pouring into small openings.



Quick-fill port on Type II AccuFlow™ features an ergonomically designed lift lever that opens wide for easy filling.



Extra capacity in all cans accommodates oil additives for two cycle engines.



1/2-in (13-mm) grip lip along bottom supports pouring and resists accidental punctures when placed on uneven surfaces.



Stainless steel flame arrester stops flashback ignition. Long 3-1/2-in (88-mm) length offer safe secure insertion of gas nozzle.



Optional 2-position polypropylene funnel for Type I cans aids in pouring and folds down for compact storage and filling.



Large ID zone permits user labeling to avoid misuse, mishaps with incompatible mixtures, or to identify owner or department.

Safety in a Can!

Comfortable, rounded handle doesn't cut into hand.

Leakproof, positive pressure relief lid automatically vents to prevent rupture or explosion. It is spring-loaded to self-close controlling vapors and spills.

Type II **AccuFlow™**



Type I

Trilingual warning label

Free swinging handle with counter-balanced design leverages the weight of the can against the opening mechanism for easy pouring and carrying.

Reinforcing ribs strengthen walls to resist denting or implosion.

Double lock seams at base and top offer four thicknesses of steel for extra "bumper guard" protection.

24-gauge galvanized steel body and handle finished in an environmentally friendly, tough powder-coat finish resists solvents and stands up to abuse.

100% leak tested

Fully compliant—meets OSHA and NFPA



SAFETY CANS & CONTAINERS

for Flammables



Swinging, full-fisted rounded handle eases carrying.

Type I Safety Cans

Self-closing, leakproof lid provides safety from spills

Designed with a single spout for filling and pouring, the sealed lid features automatic positive-pressure relief that vents between 3 and 5 psig (0.2 and 0.35 bar) to guard against rupture or explosion.

Made from high-grade coated steel, each can is tested to guarantee 100% leakproof construction. The tough powder-coat finish resists chemicals and stands up to demands of rigorous use. Each Justrite safety can is equipped with a stainless steel flame arrester which dissipates heat to stop flashback ignition. Cans up to 1 quart (1 L) feature a trigger-release handle, while larger capacities have a swinging handle to greatly ease carrying of heavier loads. Large label ID zone on swing-handle cans provides writing space to identify contents, department location, or individual user name.

Certified by FM, UL/ULC, and TÜV, Justrite safety cans also meet OSHA and NFPA requirements, and come with a ten-year warranty.

Type I Safety Can Funnel

Used to pour into smaller openings, the polypropylene funnel attaches to the spout neck of Type I safety cans sized 1 gallon (4 L) and larger.

The two-position funnel folds down for when you fill or store the can, and stays up for when you pour. Large rounded bowl provides protection from splashing and spillage. Durable construction holds up to heavy use.



Convenient hinged design allows you to fill the can without removing the funnel.



10001 10101Z 10301Z



7125200Z

7150200Z



7150100Z



7125100Z



7120100Z



7110100Z

Description and Capacity	Dimensions OD x H	Approv/Lstg Regulation	Red Can Model No	Yellow Can Model No	Ship Wt lb/kg
Trigger Handle Type I Safety Cans					
1 pint (0.5 L) steel safety can	4.812 x 6.75 in 117 x 172 mm	FM, UL/ULC, TÜV	10001	10011Z	2/1
1 quart (1 L) steel safety can	4.812 x 8.25 in 122 x 210 mm		10101Z	10111Z	
1 gallon (4 L) steel safety can	7.25 x 11.5 in 184 x 292 mm	FM, UL/ULC	10301Z	—	4/2
Swinging Handle Type I Safety Cans					
1 gallon (4 L) steel safety can	9.5 x 11 in 241 x 279 mm	FM, UL/ULC, TÜV	7110100Z	7110200Z	4/2
2 gallon (7.5 L) steel safety can	9.5 x 13.75 in 241 x 349 mm		7120100Z	7120200Z	
2.5 gallon (9.5 L) steel safety can	11.75 x 11.5 in 298 x 292 mm		7125100Z	7125200Z	
5 gallon (19 L) steel safety can	11.75 x 16.875 in 298 x 429 mm		7150100Z	7150200Z	
Polypropylene funnel	.5 x 11.25 in 13 x 286 mm	—	11202Y	—	2/1
Replacement flame arrester for 1 pint (0.5 L) and 1 quart (1 L) only	—	—	11098	11098	
Replacement flame arrester for 1 gallon (4 L) and above	—	—	11007	11007	



for Flammables

Type II AccuFlow™ Safety Cans

Vented design provides smooth, slug-free liquid flow

Go beyond protection and compliance with the added convenience of AccuFlow™ with Safe-Squeeze® trigger for safe and controlled pouring.


Justrite's patented manifold and proportional flow-control Safe-Squeeze® trigger provides you the means to regulate the flow rate when handling flammable liquids. Fill port with ergonomic lift lever makes filling easy. Flexible 9-in (229-mm) long metal hose spout helps control the pour into small openings.

Made from high-grade coated steel, each can is pressure tested to ensure quality. The tough powder-coat finish resists chemicals and stands up to demands of rigorous use. Stainless steel flame arrester—equipped in all Justrite safety cans—dissipates heat to stop flashback ignition. Sealed lid features automatic positive-pressure relief that vents between 3 and 5 psig (0.2 and 0.35 bar) to protect against explosion. Large label ID zone provides writing space to identify contents, department location, or individual user name. All can sizes have extra capacity for adding two-cycle engine oil or other additives.

Certified by FM, UL/ULC, and TÜV, Justrite safety cans also meet OSHA and NFPA requirements, and come with a ten-year warranty.

Easy-to-fill!

Ergonomic lift lever opens the self-closing spout wide for easy filling. A full-length stainless steel flame arrester dissipates heat and allows deeper, secure insertion of the nozzle when filling.

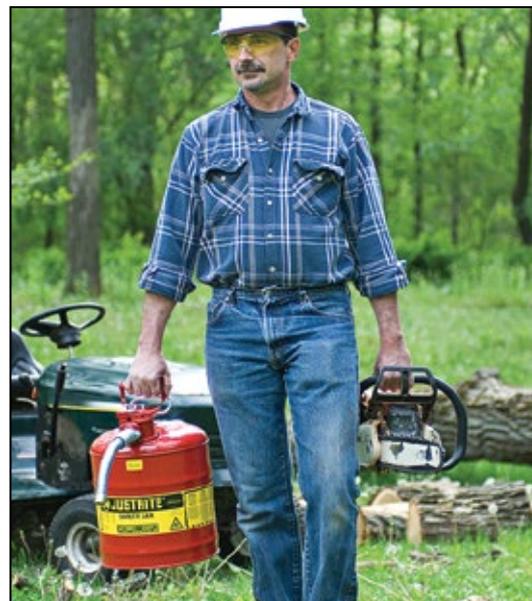

Independent carrying handle doesn't interfere with pouring mechanism—no worry about accidental spills.



7250230Z



7250130Z

7225130Z

7210120Z

7220120Z



Description and Capacity	Hose Dimensions OD x L	Can Dimensions OD x H	Approv/Lstg Regulation	Red Can Model No	Yellow Can Model No	Ship Wt lb/kg
1 gallon (4 L) steel safety can with hose	0.625 x 9 in 16 x 229 mm	9.5 x 10.5 in 241 x 267 mm	FM, UL/ULC, TÜV	7210120Z	7210220Z	7/3
2 gallon (7.5 L) steel safety can with hose		9.5 x 13.25 in 241 x 337 mm		7220120Z	7220220Z	
2.5 gallon (9.5 L) steel safety can with hose	1 x 9 in 25 x 229 mm	11.75 x 12 in 298 x 305 mm		7225130Z	7225230Z	9/4
5 gallon (19 L) steel safety can with hose		11.75 x 17.5 in 298 x 445 mm		7250130Z	7250230Z	
Replacement flame arrester, stainless steel, for 1 gallon (4 L) and above	—	—	—	11007	11007	2/1

SAFETY CANS & CONTAINERS

for Laboratories



Tilt cradle allows can to swing forward for dispensing while holding can securely on bench top.

Safety Dispensing Cans

With all the benefits of our classic Type I safety cans (see page 4), these self-closing and leakproof cans come with faucets to make them the choice of lab professionals for safe dispensing of hazardous liquids into small flasks and beakers. Fill spouts have self-closing pressure-relief caps and stainless steel flame arresters. Self-closing brass faucets provide trouble-free dispensing. Cans fitted with the 08540 faucet offer more controlled dispensing, while faucet 08902 provides a greater flow.

Polyethylene Safety Dispensing Can has superb corrosion protection, and a unique current-carrying carbon insert embedded into the container allows for proper grounding.

Steel & Poly Shelf Cans have a faucet mounted 2-in (51-mm) above the bottom to eliminate the need to lift the cans during dispensing.

Steel Tilt Cans have a faucet on top and the can rests in a sturdy metal cradle. Cradle base measures 13-13/16 x 14-in (351-mm x 356-mm).

All styles are FM approved.



Store & secure chemicals . . .

For security against unauthorized use, store safety cans in lockable Sure-Grip® EX safety cabinets – see pages 45-52.



7150250



14545Z



7150156

7150140



Description and Capacity	Can Dimensions OD x H	Approv/Lstg Regulation	Red Can Model No	Yellow Can Model No	Ship Wt lb/kg
2.5 gallon (9.5 L) steel safety shelf can with bottom faucet 08540	11.75 x 11.5 in 298 x 292 mm	FM	7225140	—	9/4
2.5 gallon (9.5 L) steel safety shelf can with bottom faucet 08902	11.75 x 16.875 in 298 x 429 mm		7225150Z	7225250	
5 gallon (19 L) steel safety shelf can with bottom faucet 08540			7150140	7150240	
5 gallon (19 L) steel safety shelf can with bottom faucet 08902			7150150Z	7150250	
5 gallon (19 L) tilt steel safety can with top faucet 08540 and stand	11.75 x 15.875 in 298 x 403 mm	FM, UL	7150146	—	13/6
5 gallon (19 L) tilt steel safety can with top faucet 08902 and stand	7150156		—		
5 gallon (19 L) poly safety shelf can with self-close brass faucet 08540	11.5 x 17 in 292 x 432 mm	FM	14545Z	—	11/5

for Laboratories

Type I Poly Cans for Flammables

Chemical-resistant HDPE cans offer safe storage for flammable corrosives

Designed with a durable one-piece body construction, these safety cans stand up to tough acids and heat. Consistent color throughout the HDPE reduces visible scratches and provides color-resistance to reduce chemical leaching, making them suitable for most high purity liquids. The containers resist dents, punctures, and chips to withstand abusive environments. The self-closing cap, pressure-relief mechanism and flame arrester work together to prevent ignition sources from entering without restricting liquid flow in or out of the can. All cans feature stainless steel hardware and flame arrester. FM-approved.



14561



14160Z

14065Z



Carbon Insert

A patented conductive current-carrying carbon insert is embedded into the rib of containers, completing a ground path between the cover assembly and the flame arrester. When used with a grounding strip, this provides proper grounding and prevents the creation of a static arc during filling or pouring.



Description and Capacity	Dimensions W x L x H	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
0.5 gallon (2 L) oval polyethylene safety can	4.625 x 7.625 x 9.5 in 117 x 194 x 241 mm	FM	14065Z	2/1
1 gallon (4 L) oval polyethylene safety can	4.625 x 7.625 x 12.75 in 117 x 194 x 324 mm		14160Z	
2.5 gallon (9.5 L) round polyethylene safety can	10.75 x 14.25 in 273 x 362 mm	FM, UL	14261	4/2
5 gallon (19 L) round polyethylene safety can	12.75 x 16 in 324 x 406 mm		14561	9/4

Self-Closing Containers for Non-flammable Corrosives

Improve safety and ensure containment with secure laboratory containers

Translucent high-density polyethylene resists acids and caustics. The 2- to 5-gallon (7.5- to 19-L) sizes have fixed position on handle, which allows lid to stay open for easy filling. Spring-close cap provides a tight seal. Flame arrester-free spout allows quick pouring of non-flammable corrosives. Oval containers have trigger handle for one-handed pouring and make the most of storage capacity.



12161

12765

Description and Capacity	Dimensions OD x H	Dimensions Spout Dia	Model No	Ship Wt lb/kg
1 gallon (4 L) oval polyethylene container with stainless steel hardware	4.625 x 7.625 x 12.75 in 117 x 194 x 324 mm	1.45 in 37 mm	12161	2/1
2 gallon (7.5 L) wide mouth polyethylene container with stainless steel hardware	12 x 14.75 in 305 x 375 mm	3.625 in 92 mm	12762	7/3
2.5 gallon (9.5 L) polyethylene container with stainless steel hardware	10.75 x 15.25 in 273 x 387 mm	1.45 in 37 mm	12260	
5 gallon (19 L) wide mouth polyethylene container with stainless steel hardware	12 x 20 in 305 x 508 mm	3.625 in 92 mm	12765	9/4

for Laboratories



Manifold kit provides a convenient, cost effective way to collect waste from multiple HPLC machines.

HPLC Safety Disposal Cans

Quick-disconnect fittings and coalescing carbon filters keep laboratory and personnel safe with a compliant, environmentally-friendly solution to waste collection

Ideal for HPLC waste applications:

- Vapor and fire protection
- Safeguard against accidental spills
- Maximize safety and convenience

Hands-free solvent collection: Solvent flows freely from your process into the container through tubing making it suitable for either pump-fed or gravity-flow HPLC waste methods. Two disconnect fittings, one intake and one vent, eliminate back pressure in liquid flow disposal line and provide controlled handling of vapor.

Durability and safety: Translucent polyethylene container allows quick visual inspection of liquid level. Pouring spout is equipped with a stainless steel flame arrester, which reliably dissipates heat to prevent flashback ignition. Spring-loaded, sealed lid automatically vents to guard against explosion. Control odors with a coalescing/carbon filter.



Quick-Disconnect system

Easy-on, easy-off mechanism offers detachment of the can from the process without leaks, drips or vapor release. Once disconnected, the container is automatically sealed to prevent spills.

Coalescing carbon filter
Optional filters are for use with only round style cans.

Optional manifold

Valved quick-disconnect fittings automatically close when decoupled to prevent vapor or liquid release.

Translucent color lets you check liquid level at a glance.

Oval-style maximizes storage space and features one-handed pouring from narrow 1-7/16-in (36-mm) spout.

Stainless-steel fittings offer PTFE O-rings on standard containers. Also available with EPDM or Viton O-ring seals on customized cans.

Easy-carrying handle with fixed position latch keeps spring loaded cover open for convenient pouring during disposal.

Economically priced polypropylene barbed fittings offer EPDM O-rings.

Large 3-5/8-in (92-mm) opening facilitates controlled pouring into larger vessels for proper hazardous waste disposal. Spout is equipped with a stainless steel flame arrester.

Meets OSHA, NFPA and EPA requirements.

Create custom cans, with up to eight ports, for multiple HPLC units. See our custom-can form online at justritemfg.com



Capacity	Dimensions OD x H	Fitting No 1 for Liquid Intake			Fitting No 2 for Vapor Release			Model No	Ship Wt lb/kg
		Material	O-Ring	Tubing* Size ID	Material	O-Ring	Tubing* Size ID		
1 gallon (4 L) oval can	7.75 x 5.25 x 12.75 in 197 x 133 x 324 mm	Polypropylene	EPDM	0.375 in 10 mm	Polypropylene	EPDM	0.375 in 10 mm	12160	2/1
2 gallon (7.5 L) round can	12 x 14.75 in 305 x 375 mm	Stainless Steel	PTFE		Stainless Steel	PTFE		TF12752	7/3
2 gallon (7.5 L) round can		Polypropylene	EPDM		Polypropylene	EPDM		PP12752	
2 gallon (7.5 L) round can		Stainless Steel	PTFE		Stainless Steel	PTFE		TF12755	
5 gallon (19 L) round can	12 x 20 in 305 x 508 mm	Polypropylene	EPDM		Polypropylene	EPDM		PP12755	11/5
5 gallon (19 L) round can		Stainless Steel	PTFE		Stainless Steel	PTFE		BY12755	
5 gallon (19 L) round can		Polypropylene	EPDM	Polypropylene	EPDM	PP12755			

* Tubing not supplied with containers.

for Laboratories

Coalescing Carbon Filters

Use with HPLC cans to minimize odor, and capture 99% of liquid particulates released in the form of gaseous vapor. Vent filter snaps conveniently into the quick-disconnect fitting. Carbon filter cartridge color indicator beads (top portion) changes from purple to black to indicate when replacement is necessary. Replace the coalescing filter (bottom portion) after three or four carbon filter cycles. Use filters with all 2-gallon (7.5-L), 5-gallon (19-L) and custom-built quick-disconnect cans; not for use with oval style can. Meets EPA 40 CFR 264.173.



Description	Attachment/Use With	Model No	Ship Wt lb/kg
Coalescing/carbon filter combo with stainless steel fittings	Disconnect cans with stainless steel fittings	28162	2/1
Coalescing/carbon filter combo with polypropylene fittings	Disconnect cans with polypropylene fittings	28161	

Carbon Filter Replacements

Description	Attachment/Use With	Model No	Ship Wt lb/kg
Colormetric/carbon filter 3-Pack replacements	28162 or 28161 Coalescing/carbon filter	28157	2/1

NOTE: When using HPLC carbon filter with FM approved Justrite safety disposal can, the Justrite safety disposal container has not been FM approved or tested in assembly with the HPLC filter attached. However, the container does comply with US OSHA 1910 and NFPA Code 30 requirements, both with and without the HPLC filter. Do not transport safety container while carbon filter is attached.



HPLC PTFE Manifold and Compression Fittings

Enables up to six waste lines (per manifold) from HPLC processes to be fed into a single intake fitting. Safety container with manifold installed is OSHA compliant and meets NFPA Code 30. Use on round containers; not for use on oval style can.



Manifold no. 28177 with stacker no. 28179 and tubing connector package nos. 28188 and 28189.

Description	Attachment/Use With	Model No	Ship Wt lb/kg
PTFE manifold with stainless steel fitting	Containers with stainless steel fittings	28177	2/1
PTFE manifold with polypropylene fitting	Containers with polypropylene fittings	28178	
PTFE manifold with stainless "stacker" connector	28177 or 28178	28179	
OD 0.0625 in hard wall ETFE tubing compression fittings with ferrules (package of six - blue)		28188	
OD 0.125 in hard wall ETFE tubing compression fittings with ferrules (package of six - green)		28189	
OD 2 mm hard wall ETFE tubing compression fittings with ferrules (package of six - yellow)		28121	
OD 2.5 mm hard wall ETFE tubing compression fittings with ferrules (package of six - orange)		28122	
OD 3 mm hard wall ETFE tubing compression fittings with ferrules (package of six - red)		28123	

Polytetrafluoroethylene (PTFE) is a synthetic fluoropolymer. Eethylene tetrafluoroethylene (ETFE) is a fluorine based plastic.



84003 with TF12755

Spill Basin

Durable polyethylene basin keeps work area clean around HPLC cans and captures any inadvertent leakage from HPLC inflow tubes.

Description	Dimensions W x L X H	Model No	Ship Wt lb/kg
5 gallon (19 L)	14.875 x 14.875 x 7.625 379 x 379 x 194 mm	84003	4/2



Need a stainless steel manifold?
For containers with stainless steel fittings, use a stainless steel manifold that accepts 4 waste lines. Visit our website and search model no. 28168.



Custom made safety disposal cans . . .
Design your own 2- or 5-gallon can with up to 8 fittings. Visit our website and search on "custom HPLC."

SAFETY CANS & CONTAINERS

for Waste Liquids



Large opening with cap held open provides convenient filling and pouring.

Liquid Disposal Safety Cans

A better solution for the containment of liquid flammable or corrosive waste

High-density polyethylene (HDPE) disposal cans provide superior chemical resistance and leak protection. Spring-loaded sealed cap, normally closed, automatically vents between 3 and 5 psig (0.2 and 0.35 bar). Stainless steel handle and hardware with latch-catch system hold the cap in the open position for easy filling and pouring. Large-mouth opening features a built-in stainless steel flame arrester to guard against outside ignition. Current-carrying, patented carbon insert embedded in the container allows for proper grounding. The broad-base design provides stability and resists accidental tip over.

Model 14265 with built-in polyethylene fill gauge indicator pops up to warn you that the container is almost full.



14762Z



14265



12754



Description and Capacity	Dimensions OD x H	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
2 gallon (7.5 L) red polyethylene can with stainless steel hardware with 08530 fill gauge built-in	12 x 14.75 in 305 x 375 mm	FM	14265	7/3
2 gallon (7.5 L) red polyethylene can with stainless steel hardware			14762Z	
2 gallon (7.5 L) white polyethylene can with stainless steel hardware			12751	
5 gallon (19 L) red polyethylene can with stainless steel hardware	12 x 20 in 305 x 508 mm	FM	14765Z	11/5
5 gallon (19 L) white polyethylene can with stainless steel hardware			12754	
Replacement flame arrester, stainless steel	—	—	11406	2/1

Countertop Lab Tray

Polyethylene tray catches drips or spills and keeps counter clean and uncontaminated. Slightly curved edge and ribbed bottom keeps containers from sitting in pooled liquid.

Description	Nominal Dimensions L x D	Model No	Ship Wt lb/kg
Countertop lab tray	31.125 x 18.5 in 791 x 470 mm	29965	4/2



for Waste Rags and Wipes


Oily Waste Cans

Dispose of oil-soaked rags and prevent fires caused by stray sparks or spontaneous combustion

Rags and cloths soaked with solvents, thinners, linseed oil, combustible adhesives and other flammable liquids present a serious fire risk when improperly discarded. Lid opens to no more than 60 degrees and stays closed when not in use, isolating contents from fire sources and limiting oxygen to virtually eliminate the risk of spontaneous combustion. Round construction and elevated base allow circulation of air around can to disperse heat and reduce moisture build-up and rusting. Durable steel construction with a powder-coat finish provides chemical resistance. Approved by FM, UL, and TÜV. All cans carry a ten-year warranty.

SoundGard™ oily waste cans include a sound muffling pad inside lid to reduce lid-closure noise by nearly 200% over standard models. Ideal for laboratories or anywhere it is desirable to lessen disruptive noise.

Lid opens no more than a 60° angle as required by UL.

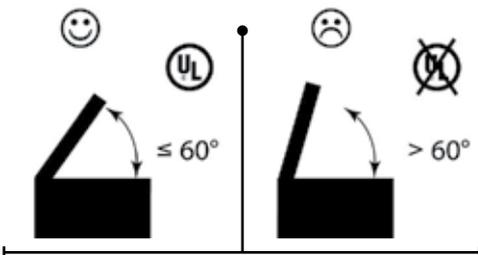

Lid opens no more than a 60° angle as required by UL.



Use colors to identify and segregate different wastes.



Sound-muffling SoundGard™ lid significantly reduces noise closure.



09101

09100

09300

09500

09700

09104



Description and Capacity	Dimensions OD x H	Approv/Lstg Regulation	Red Can Model No	Yellow Can Model No	Ship Wt kg
Oily Waste Cans					
8 liter countertop oily waste can	244 x 232 mm	FM	09200	09200Y	3
20 liter oily waste can with foot-operated cover	302 x 403 mm	FM,UL,TÜV	09100	09101	5
34 liter oily waste can with foot-operated cover	354 x 464 mm		09300	09301	
52 liter oily waste can with foot-operated cover	408 x 514 mm		09500	09501	7
80 liter oily waste can with foot-operated cover	467 x 595 mm		09700	09701	10
SoundGard™ Oily Waste Cans					
1.7 liter mini bench top oily waste can	117 x 165 mm	FM	09410	—	3
20 liter oily waste can with foot-operated cover	302 x 403 mm	FM,UL,TÜV	09108	09104	5
34 liter oily waste can with foot-operated cover	354 x 464 mm		09308	09304	

for Cleaning and Dispensing



Efficiently wet wipes with a simple pump action.

Safety Plunger Cans

Moisten cleaning cloths quickly and easily—smart-pump brings more liquid to the top and requires less time between refills

Dispense flammable liquids and solvents safely, without waste or exposure. Made of chemically resistant Ryton® and brass, the pump base is designed to leave less liquid in the bottom before having to refill.

Pushing down on the pump assembly fills the upper pan with liquid. Surplus liquid drains safely back into reservoir. The perforated upper pan serves as a flame arrester. Top rim has molded edge protector for smooth, trouble-free moistening.



Description and Capacity	Dasher Assembly	Smart-Pump Assembly	Dasher Dia	Dimension OD x H	Approv/Lstg Regulation	Red Model No	Yellow Model No	Ship Wt lb/kg
1 pint (0.5 L) steel plunger can	steel	brass & Ryton®	2.75 in (70 mm)	4.875 x 5.25 in 125 x 133 mm	FM, TÜV	10008	10018	1/1
1 quart (1 L) steel plunger can			7.25 x 5.625 in 185 x 143 mm	10108		10118	2/1	
2 quart (2 L) steel plunger can			7.25 x 7.875 in 185 x 200 mm	10208		10218		
1 gallon (4 L) steel plunger can			7.25 x 10.5 in 185 x 267 mm	10308		10318	4/2	
1 quart (1 L) polyethylene plunger can	brass		5.5 x 8.25 in 141 x 210 mm	14018Z		–	2/1	

Ryton® is a registered trademark of Chevron Phillips Chemical Company.

Polyethylene Dispensing Cans and Squeeze Bottles

Dispensing Cans permit easy, one-hand dispensing of liquids directly onto work surface. Leakproof, self-closing, brass dispenser valve minimizes spills and controls excess. FM Approved brass valves are ideal for use with flammables. Textured, high-density polyethylene body provides a firm grip.

Squeeze Bottles made of polyethylene with a stainless steel wire, provide safe dispensing of flammable liquids directly on small components or subassemblies with a minimum of over-spray. Squeezing the bottle produces a fine stream of liquid. Stem can be shaped to dispense into hard-to-get areas. Squeeze bottles are intended for daily use only.



Description and Capacity	Dimension OD x H	Spout Opening ID	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
4 ounce (0.12 L) polyethylene dispenser can, translucent	2.25 x 5.5 in 57 x 140 mm	0.25 in (6 mm)	FM	14002	2/1
8 ounce (0.24 L) polyethylene dispenser can, red	3.125 x 5.5 in 79 x 140 mm			14004	
8 ounce (0.24 L) polyethylene dispenser can, translucent				14005	
1 quart (1 L) polyethylene dispenser can, red	4 x 10.5 in 102 x 267 mm			14010	
1 quart (1 L) polyethylene dispenser can, translucent		14012			
1 pint (0.5 L) polyethylene squeeze bottle with flexible dispensing tube, translucent	3 x 7.5 in 76 x 191 mm	–	–	14009	2/1
1 quart (1 L) polyethylene squeeze bottle with flexible dispensing tube, translucent	3.5 x 9.125 in 89 x 232 mm			14011	

for Cleaning and Dispensing

Dip Tanks

Use for cleaning parts and subassemblies where the volume of work does not warrant a larger rinse tank. Portable size accommodates changing production requirements. Dip tank covers stay open for convenient access; self-closing mechanism and fusible link melts at 165°F (74°C) to snap the cover shut in case of fire. Dip tank with polyethylene liner offers outstanding chemical resistance to permit use with the harsh, corrosive chemicals.



27616

27612

27602

Description and Capacity	Dimension OD x H	Approv/Lstg Regulation	Red Model No	Yellow Model No	Ship Wt lb/kg
1 gallon (4 L) steel dip tank	9.375 x 5.5 in 238 x 140 mm	FM, TÜV	27601	27611	4/2
2 gallon (8 L) steel dip tank	9.375 x 10 in 238 x 254 mm		27602	27612	7/3
5 gallon (19 L) steel dip tank	13.75 x 13 in 349 x 330 mm		27605	27606	11/5
5 gallon (19 L) steel dip tank with HDPE liner		FM, TÜV	27615	27616	
8 gallon (30 L) steel dip tank	15.625 x 14.25 in 397 x 362 mm	FM, TÜV	27608	27618	13/6

Accessory Parts

Description	Dimensions: OD x H	Model No
Parts basket for dip tanks 27602, 27612	7.125 x 3 in 181 x 76 mm	27901Z

Bench Cans

An easy means of cleaning small parts in solvent, simply place work on spring-loaded, perforated dasher plate, press down and agitate, then release to return dasher to drain position. Plated steel dasher also works as an effective flame arrester to reduce the risk of fire flashback. Hinged cover minimizes evaporation losses and protected rim reduces the possibility of hand injury.



10291

10578

10375 with 11171

Description and Capacity	Dasher Diameter	Dimension OD x H	Approv/Lstg Regulation	Red Model No	Yellow Model No	Ship Wt lb/kg
1 quart (1 L) steel bench can	4.5 in 114 mm	4.875 x 5.5 in 124 x 140 mm	FM, TÜV	10175	10171	2/1
2 quart (2 L) steel bench can	7.5 in 191 mm	9.375 x 3.25 in 238 x 83 mm		10295	10291	4/2
1 gallon (4 L) steel bench can		9.375 x 4.5 in 238 x 114 mm		10375	10385	
2 gallon (8 L) steel bench can	9.75 in 248 mm	11.5 x 5.875 in 292 x 149 mm		10575	10578	9/4
Basket for 10375Z, 10385, 10575Z, 10578		6.4375 x .4375 in 164 x 11 mm	—	11171	—	1/1

Floor Standing Rinse Tanks

Self-close cover, operated by foot-treadle, allows a worker to open with both hands full. An adjustable-rate pneumatic cylinder prevents the cover from slamming shut when the treadle is released. Drain plug allows for easy solvent replacement.



Description and Capacity	Dimensions W x D x H	Overall Height	Approv/Lstg Regulation	Red Model No	Yellow Model No	Ship Wt lb/kg
22 gallon (83 L) steel floor standing rinse tank	32.75 x 16 x 12 in 832 x 406 x 305 mm	33 in 845 mm	FM	27220	27221	36/16

Accessory Parts

Description	Dimensions: L x W x D	Model No
Parts basket for rinse tank models 27220, 27221	28 x 13 x 4 in (711 x 330 x 102 mm)	27005
Sediment screen for rinse tank models 27220, 27221	35 x 13.75 x .75 in (889 x 349 x 19 mm)	27006



SMOKING RECEPTACLES

for Cigarette Butts



Ideal for any establishment—clean grounds help maintain your business image.

Smoker's Cease Fire® Cigarette-Butt Receptacles

Keep entrances clean from cigarette litter—fire tested and approved for safety by FM Approvals

Made of flame-retardant and sturdy polyethylene, this low maintenance smoker's friend won't rust, dent or crack. Innovative self-extinguishing design safely collects unsightly cigarette litter and reduces the risk of fire. Tie-down notches offer security and greater stability under severe weather conditions.



Units include a galvanized steel bucket that collects thousands of butts. For maximum cleaning convenience, use optional disposable bucket liners. Once bucket is full, simply twist-tie closed and throw away!

Large covered head dissipates heat and keeps rain out


A 1-1/2-in (38-mm) opening easily accepts butts and discourages waste from being dropped in

Extinguishing spot

Molded-in graphics easily identify opening for cigarette butt disposal

Large internal neck cavity minimizes clogging

Broad 16-1/2-in (419-mm) base for stability

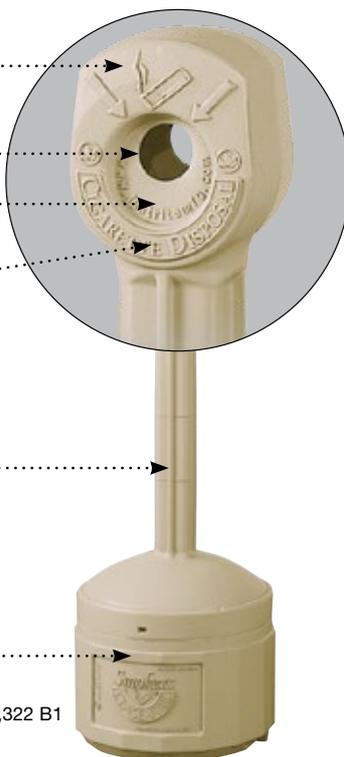

Patent: US 6,626,322 B1



Attractive design in five colors hides cigarette litter

Description	Color	Dimensions H x Dia	Approv/Lstg Regulation	Capacity	Model No	Ship Wt lb/kg
Original Smoker's Cease Fire®	Pewter Gray	38.5 x 16.5 in 978 x 419 mm	FM	4 Gallons 15 L	26800	11/5
Original Smoker's Cease Fire®	Adobe Beige				26800B	
Original Smoker's Cease Fire®	Deco Black				26800D	
Original Smoker's Cease Fire®	Terra Cotta				26800T	
Original Smoker's Cease Fire®	Forest Green				26800G	
Disposable Bucket Liner - 10 pack with twist ties. Fits any bucket 11.75 W x 10 in H (298 W x 254 mm H)			FM*		26827	2/1
Bucket Liner Master Pack - 25 packs of ten with twist ties					26830	35/16

*Use of liner with receptacle as a system is FM-approved



for Cigarette Butts

Elite™ Smoker's Cease Fire® Cigarette-Butt Receptacles

Attractive contemporary styling with fire safe construction approved by FM Approvals

Hide unsightly cigarette butts and reduce the risk of fire. Polyethylene construction features a large stainless steel snuffer that discourages use of top to put out cigarette. Keeps unit clean from stains. A steel pail inside removes for easy cleaning and can be fitted with optional bucket liner. Compact carton saves on shipping costs. Optional cable kit available for severe weather or security.



Optional burn resistant aluminum/poly liner makes it easy to clean. Once liner is full, simply remove bag liner, close it off with included twist-tie, and discard. Large steel pail is included.



Optional anchoring cable kit includes cable and padlock.



Simply drop in lit cigarette or use perforated snuffer.



Description	Color	Dimensions H x Dia	Approv/Lstg Regulation	Capacity	Model No	Ship Wt lb/kg
Elite™ Smoker's	Cool Gray	38 x 12 in 965 x 305 mm	FM	4 gallons 15 L	268501	11/5
Elite™ Smoker's	Sierra Tan				268502	
Elite™ Smoker's	Eco Black				268503	
Anchoring cable kit	—	—	—	—	268505	2/1
Brass padlock	—	—	—	—	268506	
Disposable bucket liner - 10 pack with twist ties. Fits any bucket 11.75 in (298 mm) wide x 10 in (254 mm) high			FM*	—	26827	
Liner master pack - 25 packs of ten with twist ties					26830	35/16
Replacement pail					26802	4/2

*Use of liner with receptacle as a system is FM-approved



Three popular colors; black is made from 75% recycled content

Grey Cease-Fire® Waste Receptacles

The safe answer to waste paper and other solvent-free combustibles accumulation

Justrite's Cease-Fire® Waste Receptacles are specially contoured to direct smoke and gas from any fire inside the container, back into the combustion area, cutting off the air supply and extinguishing flames in seconds. Cease-Fire® receptacles provide around-the-clock protection against trash fires and are suitable for use in plants, hospitals, schools, offices and stores. Drums should be filled ¾ full only.

Description and Capacity	Opening Dia	Dimensions OD x H	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
12 gallon (45 L) drum with aluminum head	5.25 in (133 mm)	5.125 x 21 in (384 x 533 mm)	FM, UL	26612G	11/5
55 gallon (200 L) drum with aluminium head	7.875 in (200 mm)	24 x 35.5 in (610 x 902 mm)	FM	26655G	35/16
Head only for 12 gallon (45 L) drum	5.25 in (133 mm)	15.125 in (384 mm)	FM, UL	26512	2/7
Head only for 55 gallon (200 L) drum	7.875 in (200 mm)	24 in (610 mm)	FM	26555	4/2



26655G

for Flammables

Safety Drum Funnels

Prevent spills when transferring flammable solvents, thinners, oils or paint wastes

- Wide-mouth opening with hinged, stay-open lid.
- Built-in flame arrester prevents fire intrusion.
- Self-closing lid in case of fire.
- Galvanized steel with durable exterior epoxy powder-coat finish.

Safely transfer flammable liquids into a 30- or 55-gallon (110- or 200-L) drum using this 2.6-gallon (9.8-L) capacity safety funnel that fits into a 2-in (51-mm) bung. Wide 10-3/4-in (273-mm) mouth handles rapid pouring without spills. A built-in brass flame arrester absorbs and dissipates heat preventing any external ignition source from reaching the drum's content. Self-closing cover with a fusible link, that melts at 165°F (74°C), automatically shuts in case of a fire. Heavy-duty 18-gauge (1-mm thick) galvanized steel construction with electrostatically applied epoxy powder-coat offers excellent durability and chemical resistance. Lid in closed position reduces vapors and accepts a lock (not included) to prevent unauthorized access.

FM Approved. EPA and OSHA compliant.



08205



08207



08227



Fusible link melts at 165°F (74°C) and cover snaps shut to extinguish flames.

Hinged lid stays open for easy pouring.

Lid latch accepts lock to prevent unauthorised access.

Fits all standard 2-in (51-mm) bungs on 30- or 55-gallon (110- or 200-liter) drums.

Safely collect flammable waste and protect workers from dangerous spills.



Description	Funnel Size Dia x H	Mouth Dia	NPT/NPS	Approv/Lstg Regulation	Red Funnel Model No	Yellow Funnel Model No	Ship Wt lb/kg
Safety drum funnel with self-closing cover and 6 in (152 mm) flame arrester.	10.75 x 10 in 273 x 254 mm	10.75 in 273 mm	2 in (DN50)	FM, TÜV	08207	08227	11/5
Safety drum funnel with self-closing cover and 32 in (813 mm) flame arrester.					08205	08206	29/13


for Flammables

Safety Drum Vents

Automatic pressure relief ensures safe workplace

No more worrying about pressure building up in your drums. These safety drum vents automatically relieve pressure between 3 and 8 psi (30 to 55 kPa). Vents are tested to allow 61 cubic inch (1-L) of water through a 3/8-in (9.5-mm) pipe nipple in less than 6 seconds. Keep the vent in closed position to prevent flammable vapor from escaping. A built-in flame arrester helps absorb and dissipate heat for added safety. Vacuum relief is automatic on vertically installed vents and manual on horizontally installed vents.

Drum vents are FM Approved.

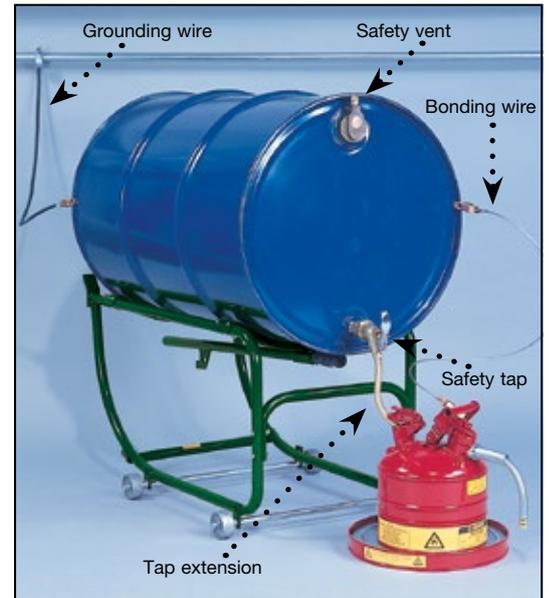

Create a safe dispensing station using Justrite® safety products.



Description	Vacuum Relief	NPT/NPS	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
Brass vertical vent for petroleum-based applications	Auto	2 in (DN 50)	FM	08101*	2/1
Brass horizontal vent for petroleum based applications	Manual			08300	
Nonmetallic vertical vent, plated steel flame arrester, for petroleum based applications	Auto			08005*	
Nonmetallic vertical vent, stainless steel flame arrester for chlorinated solvents				08006*	

* Must be installed in vertical position.

Antistatic Wires

Reduce fire risks by preventing sparks from static electricity

Use these antistatic wires to ground dispensing stations and containers to reduce fire risks from static electricity. Wires come in 3-ft (1-m) and 10-ft (3-m) lengths; for longer reach use several wires with 1/4-in (6-mm) terminal ends.



08497



08499

Description	End Connections	Model No	Ship Wt lb/kg
Insulated wire, 10 foot (3 meters) coiled	Hand clamp x 0.25 in (6 mm) terminal	08497	2/1
Flexible wire, 3 foot (1 meter)	Dual hand clamps	08499	

Safety Drum Faucets

Safe and easy dispensing from horizontal drums

Simply place these faucets on your drum for leakproof dispensing of flammable liquids. Faucets feature an internal flame arrester that prevents flashback of fire into the drum for added safety. Brass construction with a polytetrafluoroethylene (PTFE) seal ensures excellent chemical resistance. Take the worry out of awkward spout position with adjustable models 08910 and 08916. They feature a coupling nut that provides rotation of the spout downward after the faucet is threaded in place. Use Model 08552 for viscous noncorrosive flammables such as adhesives, paint or heavy oils above 2000 SSU (about 30W oil).

Faucets are FM Approved.



Description	NPT/NPS	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
Brass safety tap, rigid	0.75 in (DN20)	FM	08902	2/1
Brass safety tap, adjustable			08910	
Brass control flow lab safety tap			08540	
Brass drum gate valve, viscous liquids			08552	7/3
Stainless steel faucet, adjustable			08916	2/1



DRUM FUNNELS & EQUIPMENT

for Combustible Waste and Accessories



High-visibility red finish provides increased awareness in the workplace.

Safety Drum Covers

Convert open-top 55-gallon (200-L) steel drums into handy receptacles

Self-closing Drum Cover turns a drum into a fire-safe receptacle for combustible waste. Simply use a screwdriver and wrench to attach the cover to a drum. For added safety, a replaceable fusible-link assembly melts at 165°F (74°C) to automatically allow spring-loaded cover to slam shut if there is a fire in the drum. Durable steel construction with powder-coat finish provides excellent chemical resistance. Fits drums from 22-1/4-in to 22-3/4-in (565- to 578-mm) diameter. Self-closing drum cover is FM and TÜV Approved.

VaporTrap™ Drum Cover converts a drum into a convenient collection center. A spring-loaded lid closes securely with a slight touch of the hand. Gasket around the rim prevents vapors from escaping. Use the additional 4-3/4-in (121-mm) port for disposing small containers without having to open the entire lid. Manual latching cover vents to relieve pressure build-up. Lid latch accepts a lock (not included) to prevent unauthorized access.

VaporTrap™ drum cover is FM approved and complies with EPA regulations.



26754



26754



26750



Description and Capacity	Approv/Lstg Regulation	Red Model No	Yellow Model No	Ship Wt lb/kg
Self-close drum cover with fusible link for 55 gallon (200 L) drums	FM,TÜV	26750	26751	15/7
VaporTrap™ drum cover for 55 gallon (200 L) drums	FM,EPA	26754	—	

Drum Locks

Safely secure drum contents without the risk of contamination

Keep your drum contents safe from theft, sabotage and contamination with these drum locks. Locks install easily around the bung flange without the need to remove the original bung. Made of corrosion resistant, non-sparking die cast.



Lock up the drum contents to prevent unauthorized access.



Description and Capacity	Model No	Ship Wt lb/kg
Steel drum lock set fits 2 in & 0.75 in (DN50 & DN20) bung (set of 2 padlocks)	08510	2/1
Plastic drum lock set fits 2 in (DN50) bung (set of 2 padlocks)	08511	

Flexible Containment

Rigid-Lock QuickBerm® Plus **NEW**

Heavy-duty construction provides long-term spill containment for vehicles, heavy equipment, tankers, and more

- Single-piece construction – patented Rigid-Lock wall-support system integral to berm provides unobstructed work space.
- Quick and easy setup – no assembly required.
- Durable EnGuard™ VI modified PVC coated fabric withstands long-term UV exposure – great for outdoor use.

The QuickBerm Plus® offers superior protection and chemical resistance against the harshest of liquids, including petroleum, oils, greases, and most acids. Exhibits three times greater resistance against punctures and abrasion, resulting in longer wear over other popular QuickBerm® products – excellent for heavy vehicle traffic.

Unlike floating-wall type berms that are susceptible to wall collapse and containment failure, the patented Rigid-Lock stainless steel brace supports walls at full 90° locked position for secure, leakproof containment. A simple push on the walls unlocks the support and lays the wall down for drive-through capability from any angle.

The built-in Rigid-Lock wall supports maximize usable space inside the berm and greatly reduce any tripping hazard on the berm perimeter. Reinforced CriticalCorner™ design with wraparound diagonal radio frequency (RF) welds offer exceptionally strong structural integrity to prevent seam leaks, provide fluid-tight reliability, and extend berm life expectancy. Finished hem edge on top of sidewall prevents fraying and adds strength. Each support includes an integrated hole for anchoring the berm under high wind conditions. Anchor stakes not included.

See page 28 for tarps, ground mats, track mats, or track runners to provide extra protection against rocky surfaces or heavy in-out traffic use.

Helps comply with EPA for containment and spill prevention (SPCC).



28504




Capacity Gallons/Liters	Dimensions W x L x H		Model No	Ship Wt lb/kg
	Interior	Folded		
595/2252	8 ft x 10 ft x 12 in 2.4 m x 3.0 m x 305 mm	24 in x 24 in x 12 in 610 mm x 610 mm x 305 mm	28500	49/22
1120/4240	10 ft x 15 ft x 12 in 3.0 m x 4.6 m x 305 mm	24 in x 24 in x 16 in 610 mm x 610 mm x 406 mm	28502	75/34
2510/9501	12 ft x 28 ft x 12 in 3.7 m x 8.5 m x 305 mm	32 in x 32 in x 16 in 813 mm x 813 mm x 406 mm	28504	139/63
4485/16978	12 ft x 50 ft x 12 in 3.7 m x 15.2 m x 305 mm	36 in x 36 in x 20 in 914 mm x 914 mm x 508 mm	28506	269/122
4840/18321	12 ft x 54 ft x 12 in 3.7 m x 16.5 m x 305 mm	36 in x 36 in x 24 in 914 mm x 914 mm x 610 mm	28508	285/129
5860/22183	14 ft x 56 ft x 12 in 4.3 m x 17.1 m x 305 mm	40 in x 40 in x 24 in 1016 mm x 1016 mm x 610 mm	28510	321/146

Note (1): For exterior dimension, add 8-in (203-mm) to width and length to account for support and hub.

Note (2): When selecting a berm size, allow 12-in (305-mm) at entry or exit for lowering and raising the wall.

Ask about custom berm sizes

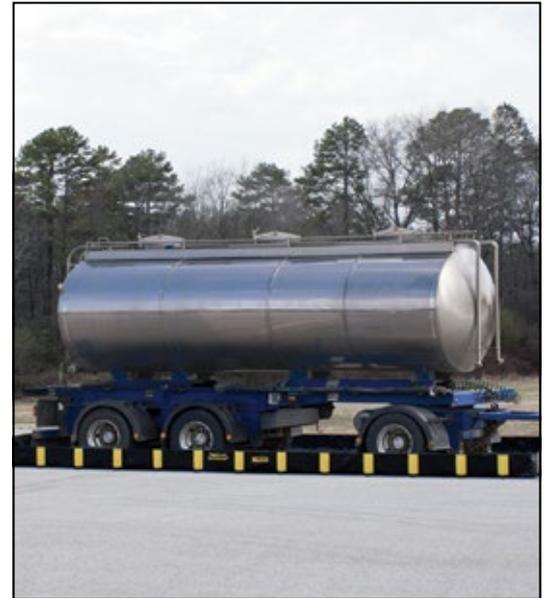

Rigid-Lock design provides large-scale spill protection with optimum floor space for unobstructed drive-through capability.

Unmatched structural integrity

Patented Rigid-Lock Mechanism



Sets up to a 90° locked position. Integrated holes in hub permit easy anchoring.

Critical-Corner™ Construction



Reinforced, wraparound design prevents seam leaks for fluid-tight reliability.




Supports fold down and lie flat to allow large vehicles to drive in from any angle. Highly chemical-resistant fabric offers exceptional abrasion and puncture resistance.

Flexible Containment



Portable, drive-in containment berms can be used anywhere, indoors or out, for storage of drums, tanks, or leaky equipment.


No assembly needed – saves time, ready in minutes!



Unfold berm, exposing supports in flat position.



A simple tug locks supports in upright position.



Fully deployed for quick spill readiness!

Unmatched structural integrity

Patented Rigid-Lock Mechanism



Sets up to a 90° locked position. Integrated holes in hub permit easy anchoring.



Stainless steel support is encased in protective hub to withstand vehicle traffic.

Critical-Corner™ Construction



Reinforced, wraparound design prevents seam leaks for fluid-tight reliability.

Rigid-Lock QuickBerm® **NEW**

Safe, drive-in spill containment for drums, IBC totes, and tanks

- *Single-piece construction – patented Rigid-Lock wall-support system integral to berm provides unobstructed work space.*
- *Quick and easy setup – no assembly required.*
- *Durable EnGuard™ V modified PVC coated fabric withstands long-term UV exposure—great for outdoor use.*

Ergonomic design provides 100% inside berm accessibility with an unobstructed side-to-side floor space for vehicle tires, foot traffic, and cleaning. The patented Rigid-Lock wall-support design protects personnel against trips and falls when walking along the outside perimeter. Built-in stainless steel wall supports lock the sidewalls in a 12-in (305-mm) high, 90° vertical position. The Rigid-Lock QuickBerm® offers immediate, secure deployment and no-worry, spill-readiness.

Like the QuickBerm® Plus the standard QuickBerm® withstands a broad range of chemicals including petroleum, oils, grease, and most acids—durable enough for extended wear. Exceptionally strong structural integrity includes a reinforced CriticalCorner™ design featuring wraparound diagonal radio frequency welds to prevent billowing, unwrapping, or sagging of the corners during full containment for fluid-tight reliability. Walls include a 1-in (25-mm) fray-resistant finished hem along the top rim for added wall strength and integrity. Each support includes an integrated hole for anchoring the berm under high wind conditions. Anchoring stakes not included. Sidewalls lower quickly for easy drive-in and out. Portable design folds down quickly for storage and transport.

Helps comply with EPA for containment and spill prevention (SPCC).

Note: the difference between the QuickBerm® Plus (page 19) and the standard Rigid-Lock QuickBerm® is the durability of the PVC-coated fabric. The Plus version with EnGuard™ VI material is thicker and more durable for more frequent drive-in or -out applications. The standard QuickBerm® constructed of EnGuard™ V material is better suited for infrequent drive-in or -out scenarios, pedestrian traffic, and for placing heavy materials within the working space.

See page 28 for tarps, ground mats, track mats, or track runners to provide extra protection against rocky surfaces or heavy in-out traffic use.



Capacity Gallons/Liters	Dimensions W x L x H		Model No	Ship Wt lb/kg
	Interior	Folded		
175/662	4 ft x 6 ft x 12 in 1.2 m x 1.8 m x 305 mm	24 in x 24 in x 5 in 610 mm x 610 mm x 127 mm	28512	24/11
235/890	4 ft x 8 ft x 12 in 1.2 m x 2.4 m x 305 mm	24 in x 24 in x 6 in 610 mm x 610 mm x 152 mm	28514	28/13
355/1344	6 ft x 8 ft x 12 in 1.8 m x 2.4 m x 305 mm	24 in x 24 in x 12 in 610 mm x 610 mm x 305 mm	28516	35/16
475/1798	8 ft x 8 ft x 12 in 2.4 m x 2.4 m x 305 mm	26 in x 26 in x 12 in 660 mm x 660 mm x 305 mm	28518	41/19
745/2820	10 ft x 10 ft x 12 in 3.0 m x 3.0 m x 305 mm	28 in x 28 in x 12 in 711 mm x 711 mm x 305 mm	28519	54/25
1075/4069	12 ft x 12 ft x 12 in 3.7 m x 3.7 m x 305 mm	28 in x 28 in x 12 in 711 mm x 711 mm x 305 mm	28522	69/31
1435/5432	12 ft x 16 ft x 12 in 3.7 m x 4.9 m x 305 mm	26 in x 26 in x 16 in 660 mm x 660 mm x 406 mm	28524	86/39
1795/6795	12 ft x 20 ft x 12 in 3.7 m x 6.1 m x 305 mm	30 in x 30 in x 12 in 762 mm x 762 mm x 406 mm	28526	102/46
1910/7230	16 ft x 16 ft x 12 in 4.9 m x 4.9 m x 305 mm	36 in x 36 in x 16 in 914 mm x 914 mm x 406 mm	28528	105/48
2390/9047	16 ft x 20 ft x 12 in 4.9 m x 6.1 m x 305 mm	36 in x 36 in x 20 in 914 mm x 914 mm x 508 mm	28530	124/56
2990/11318	20 ft x 20 ft x 12 in 6.1 m x 6.1 m x 305 mm	38 in x 38 in x 22 in 965 mm x 965 mm x 559 mm	28532	187/85

Note (1): For exterior dimension, add 8-in (203-mm) to width and length to account for support and hub.

Note (2): When selecting a berm size, allow 12-in (305-mm) at entry or exit for lowering and raising the wall.

Ask about custom berm sizes

Flexible Containment

Rigid-Lock QuickBerm® Lite **NEW**

Portable, versatile containment berm deploys quickly for emergency spill response

Leakproof, tough EnGuard™ I PVC coated fabric provides broad UV and chemical resistance that withstands repeated usage. The patented Rigid-Lock wall supports maximize usable space inside the berm and greatly reduce any tripping hazard around the perimeter. Stainless steel braces support wall at 90° locked position for secure, leakproof containment.

Lightweight berm folds down easily to a small size for storage in trucks, emergency vehicles, and spill kits. Add optional grates to help reduce contact with contaminated liquids by personnel or equipment.

Helps comply with EPA for containment and spill prevention (SPCC).

Applications:

- Saddle tank ruptures
- Personnel and small equipment decontamination
- Fuel tank overspill protection
- Hydraulic leaks and breaks
- Transformer storage
- Leaky containers, machinery, and piping
- Overfills from aircraft or locomotive refueling
- Truck, auto, and forklift battery storage
- Spill kit addition



28372



Quickly capture spills from damaged saddle tanks, minimizing ground contamination and associated clean-up costs.



Use as an emergency decontamination station with optional grating.



Capacity Gallons/Liters	Interior	Folded	Model No	Ship Wt lb/kg
79/299	4 ft x 4 ft x 8 in 1.2 m x 1.2 m x 203 mm	8 in x 11 in x 5 in 203 mm x 279 mm x 127 mm	28370	13/5
119/451	4 ft x 6 ft x 8 in 1.2 m x 1.8 m x 203 mm	8 in x 11 in x 6 in 203 mm x 279 mm x 152 mm	28372	16/6
159/602	4 ft x 8 ft x 8 in 1.2 m x 2.4 m x 203 mm	8 in x 13 in x 7 in 203 mm x 330 mm x 178 mm	28374	20/9
318/1204	8 ft x 8 ft x 8 in 2.4 m x 2.4 m x 203 mm	11 in x 14 in x 8 in 279 mm x 356 mm x 203 mm	28376	29/13
398/1507	8 ft x 10 ft x 8 in 2.4 m x 3.0 m x 203 mm	12 in x 16 in x 10 in 305 mm x 406 mm x 254 mm	28378	33/15

Note (1): For exterior dimension, add 8-in (203-mm) to width and length to account for support and hub.
 Note (2): When selecting a berm size, allow 8-in (203-mm) at entry or exit for lowering and raising the wall.



QuickBerm® Lite . . .

An economical way to equip truck fleets with emergency spill control from punctured fuel tanks—folds compactly and sets up quickly. Visit our website and search QuickBerm® Lite.

Flexible Containment



Quick-deployment Decon QuickBerm® used by first responders for emergency decontamination of personnel.



Individual, leakproof zones prevent contaminated fluid from traveling from one zone to another.

Decon QuickBerm® **NEW**

Portable multi-zone decon stations help prevent environmental contamination

- *Single-piece construction—patented inside wall-support system forms watertight wash down zones.*
- *Quick and easy setup—no assembly required.*

For emergency deployment, these multi-stage berms with patented interior walls create wash down zones that safely capture and contain contaminated solutions. Select from two-, three-, or four-zone models. Watertight, lightweight PVC coated fabric provides wide range of chemical resistance. The 8-inch (203-mm) walls allow for easy entry and exit of the compartments. One ¾-in GHT drain fitting per zone. Order optional grates to keep personnel above liquid.




28572

Capacity Gallons/Liters	Zones	Dimensions W x L x H		Model No	Ship Wt lb/kg
		Interior	Folded		
299/1132	2	6 ft x 10 ft x 8 in 1.8 m x 3.0 m x 203 mm	24 in x 24 in x 4 in 610 mm x 610 mm x 102 mm	28570	20/9
478/1810	3	6 ft x 16 ft x 8 in 1.8 m x 4.9 m x 203 mm	26 in x 26 in x 5 in 660 mm x 660 mm x 127 mm	28572	34/15
598/2264	4	6 ft x 20 ft x 8 in 1.8 m x 6.1 m x 203 mm	28 in x 28 in x 4 in 711 mm x 711 mm x 102 mm	28574	46/21

Grates **NEW**


Keep parts and equipment away from fluids and contaminants

Durable, anti-slip grates help keep drums and other objects above spills. Made of chemical resistant, easy-to-clean polyethylene.



28428

Description	Dimensions W x L x H	Model No	Ship Wt lb/kg
Polyethylene Grating	2 ft x 2 ft x 2 in 0.6 m x 0.6 m x 51 mm	28428	12/5
Polyethylene Grating	2 ft x 4 ft x 2 in 0.6 m x 1.2 m x 51 mm	28430	25/11



**Chemical compatibility—
make an informed decision . . .**

Knowing chemicals that are compatible with a product will help ensure its performance and longevity. For the compatibility charts associated with the Flexible Spill Containment products, visit justritemfg.com.

Flexible Containment

Maintenance Spill Berms **NEW**

Compact and flexible spill containment deploys instantly in the shop or field

- No assembly required—simply unfold and use.
- Encased urethane foam sidewalls offer easy roll-through access without the need for a ramp.
- Walls quickly spring back into place with no memory loss.

Quickly contain minor spills and leaks during temporary storage of drums, machine parts, batteries, and equipment. Lightweight PVC coated fabric provides broad UV and chemical resistance. Anchor berm in place using the brass grommets in each corner. Anchor stakes not included. Order optional grates to keep products and machinery above fluid. See page 22 for grates.

Helps comply with EPA for spill prevention (SPCC).



Portable, flexible spill berm provides leak and spill protection anywhere in your facility.

Capacity Gallons/Liters	Interior W x L	Dimensions		Model No	Ship Wt lb/kg
		Folded W x L x H	Sidewall Height		
5/19	2 ft x 2 ft 0.6 m x 0.6 m	30 in x 30 in x 2 in 762 mm x 762 mm x 51 mm	2 in 51 mm	28414	8/4
10/38		30 in x 30 in x 4 in 762 mm x 762 mm x 102 mm	4 in 102 mm	28400	10/5
10/38	2 ft x 4 ft 0.6 m x 1.2 m	30 in x 54 in x 2 in 762 mm x 1372 mm x 51 mm	2 in 51 mm	28416	10/5
20/76		16 in x 30 in x 16 in 406 mm x 762 mm x 406 mm	4 in 102 mm	28402	12/5
40/151	2 ft x 8 ft 0.6 m x 2.4 m	28 in x 28 in x 16 in 711 mm x 711 mm x 406 mm	4 in 102 mm	28404	18/8
20/76		30 in x 30 in x 6 in 762 mm x 762 mm x 152 mm	2 in 51 mm	28418	14/6
40/151	4 ft x 4 ft 1.2 m x 1.2 m	20 in x 24 in x 16 in 508 mm x 610 mm x 406 mm	4 in 102 mm	28406	19/9
60/227		24 in x 24 in x 16 in 610 mm x 610 mm x 406 mm	4 in 102 mm	28408	26/12
40/151	4 ft x 8 ft 1.2 m x 2.4 m	30 in x 30 in x 12 in 762 mm x 762 mm x 305 mm	2 in 51 mm	28421	28/13
80/303		36 in x 36 in x 16 in 914 mm x 914 mm x 406 mm	4 in 102 mm	28410	32/15
44/167	6 ft x 6 ft 1.8 m x 1.8 m	24 in x 24 in x 16 in 610 mm x 610 mm x 406 mm	2 in 51 mm	28422	31/14
90/341		38 in x 38 in x 16 in 965 mm x 965 mm x 406 mm	4 in 102 mm	28412	84/38
135/511	10 ft x 11 ft 3.0 m x 3.4 m	28 in x 28 in x 16 in 711 mm x 711 mm x 406 mm	2 in 51 mm	28424	50/23
220/833	10 ft x 18 ft 3.0 m x 5.5 m	30 in x 30 in x 16 in 762 mm x 762 mm x 406 mm		28426	65/30

Note: For exterior dimension on 4-in (102-mm) models, add 12-in (305-mm) to width and length.
For exterior dimension on 2-in (51-mm) models, add 6-in (152-mm) to width and length.



Roll-over sidewalls offer easy drum placement—foam walls quickly spring back for secure containment.



Folds up for easy storage.



28416

28414



28416 and 28430



28400 and 28428



Available in 2-in (51-mm) and 4-in (102mm) heights.

Flexible Containment



Position drip pad in tight spaces between machinery to capture oily leaks.

Drip Pads **NEW**

Capture small oil leaks and drips before they contaminate the ground or create unsafe work surfaces

- Lightweight, flexible, and portable – great for containing small oil drips from leaky vehicles, industrial machinery equipment, hydraulic lines, pipes, and drums.
- Made from UV- and chemical-resistant modified PVC.
- Patented design feature includes a coated mesh outer layer to trap coarse debris.

These drip pads feature replaceable, oil-only sorbent within a welded leakproof barrier. Rated for drive over applications, pads include brass grommets in opposing corners for anchoring. Anchoring stakes not included. Pads come in two sizes; extended model is weighted to keep it down in high winds. Outer shell is reusable with optional refill sorbent packs.

Helps comply with EPA for spill prevention (SPCC).



Description	Capacity Gallons/Liters	Dimensions		Model No	Ship Wt lb/kg
		Product W x L	Folded W x L x H		
Drip Pad with 5-Pack Sorbents	1.25/5	21 in x 23 in 533 mm x 584 mm	—	28458	4/2
Extended Drip Pad with 5-Pack Sorbents	1.75/7	24 in x 36 in 610 mm x 914 mm	24 in x 12 in x 6 in 610 mm x 305 mm x 152 mm	28459	8/4
Drip Pad 5-Pack Refill	1.25/5	15 in x 19 in 381 mm x 483 mm	—	28460	2/1
Extended Drip Pad 5-Pack Refill	1.75/7	30 in x 52 in 762 mm x 1321 mm	—	28461	4/2

Washdown QuickBerm® **NEW**

Portable drive-through station captures contaminated water from vehicle and construction equipment wash down

Durable vinyl coated material reinforced with radio frequency-welded, high visibility yellow runway strips that withstand drive-thru traffic, including backhoes and skid steers. Removable 4-in (102-mm) diameter foam inserts support sidewalls while 2-in H x 8-in W (51- x 203-mm) planks (not included) slide into pockets to keep end walls elevated preventing wastewater from escaping during drive-over. Simply remove foam inserts to fold material for quick and compact storage. Two 1-in NPT fittings on each side of the berm for drainage. Brass grommets around perimeter provide the ability to securely anchor berm during use. Anchor stakes not included.


Helps comply with EPA for stormwater regulations.



Wash down dirty equipment and recapture water for reclamation.

Capacity Gallons/Liters	Dimensions W x L x H		Model No	Ship Wt lb/kg
	Interior	Folded		
250/947	10 ft x 11 ft x 4 in 3.0 m x 3.4 m x 102 mm	40 in x 40 in x 20 in 1016 mm x 1016 mm x 508 mm	28576	155/70
425/1609	10 ft x 18 ft x 4 in 3.0 m x 5.5 m x 102 mm	40 in x 40 in x 24 in 1016 mm x 1016 mm x 610 mm	28578	164/74
750/2840	12 ft x 26 ft x 4 in 3.7 m x 7.9 m x 102 mm	40 in x 40 in x 36 in 1016 mm x 1016 mm x 914 mm	28579	240/109
1800/6815	14 ft x 54 ft x 4 in 4.3 m x 16.5 m x 102 mm	40 in x 40 in x 48 in 1016 mm x 1016 mm x 1219 mm	28581	325/147

Note: For exterior dimension, add 8-in (203-mm) to width and 36-in (914-mm) length.



Drain fitting offers an easy way to redirect liquids.



Drive over endwalls without losing liquids.

Flexible Containment

Ceiling Leak Diverters **NEW**

Redirect roof or pipe leaks to prevent water damage

- Available with high strength magnets for steel rafter attachment, or grommets for bungee or zip tie attachment.
- Constructed with cinched corners for quick and easy installation.

Durable, puncture resistant, and watertight PVC-coated yellow fabric is designed to channel overhead pipe and ceiling leaks to containers or floor drains. Diverters help provide a fast and economical way to protect your personnel, equipment, and inventory. Simply connect to a standard garden hose to drain water safely away. Flow rate of 3.3 gal/min (12.5 L/min).



Suspended funneling design diverts damaging water from ceiling leaks to protect personnel, inventory, and equipment.

Product W x L	Dimensions		Model No Grommets	Model No Magnets	Ship Wt lb/kg
	Folded W x L x H				
5 ft x 5 ft 1.5 m x 1.5 m	18 in x 12 in x 2 in 457 mm x 305 mm x 51 mm		28300	28302	7/3
7 ft x 7 ft 2.1 m x 2.1 m	18 in x 16 in x 4 in 457 mm x 406 mm x 102 mm		28304	28306	10/5
10 ft x 10 ft 3.0 m x 3.0 m	18 in x 16 in x 6 in 457 mm x 406 mm x 152 mm		28308	28310	15/7
12 ft x 12 ft 3.7 m x 3.7 m			28312	28314	23/10
15 ft x 15 ft 4.6 m x 4.6 m	18 in x 16 in x 10 in 457 mm x 406 mm x 254 mm		28315	—	35/16
20 ft x 20 ft 6.1 m x 6.1 m	18 in x 16 in x 14 in 457 mm x 406 mm x 356 mm		28318	—	65/30

Mini-Berm Flex Tray **NEW**


Compact, portable spill control for harsh and hazardous chemicals

Safe and reliable for tabletop parts cleaning and fluid transfer operations involving petroleum products and acids, the Mini-Berm Flex Tray is made from a robust modified PVC-coated fabric. It features rigid corner supports and sturdy foam walls. Each berm comes with a 1-in NPT drain fitting. Simply attach hose and transfer fluids for disposal. Easy to fold and store; utility strap included.

Helps comply with EPA for containment and spill prevention (SPCC).



Capacity Gallons/Liters	Dimensions W x L x H		Model No	Ship Wt lb/kg
	Interior	Folded		
30/114	3 ft x 3 ft x 6 in 0.9 m x 0.9 m x 152 mm	5 in x 50 in x 7 in 127 mm x 1270 mm x 178 mm	28442	5/2
55/208	4 ft x 4 ft x 6 in 1.2 m x 1.2 m x 152 mm	5 in x 62 in x 7 in 127 mm x 1575 mm x 178 mm	28444	7/3
70/265	4 ft x 5 ft x 6 in 1.2 m x 1.5 m x 152 mm	8 in x 60 in x 8 in 203 mm x 1524 mm x 203 mm	28446	12/5
110/416	5 ft x 6 ft x 6 in 1.5 m x 1.8 m x 152 mm	8 in x 62 in x 8 in 203 mm x 1575 mm x 203 mm	28448	18/8

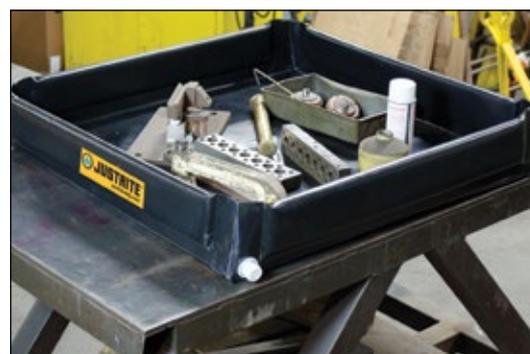

28442

Flexible Containment



Space-saving design for emergency spill control from ruptured saddle tanks.

Pop-Up Pools **NEW**

Economical emergency spill containment - simply unfold, shake from foam ring top, and place under leaking equipment

- Folds tightly and stows easily.
- Embedded foam ring top raises containment wall as fluid level increases.

Use these space-saving and lightweight pools to contain spills from punctured saddle tanks, or leaking drums, hydraulic lines, pipes, and machinery. The durable vinyl fabric is 20% heavier than other models on the market, providing increased abrasion resistance and more reliable seam adhesions. Yellow color provides visibility and easy identification.

Helps comply with EPA for containment and spill prevention (SPCC).



Use for temporary spill containment for leaky drums.



Folds to a compact size for storage in tight spaces.



28319



28321

SUPPORTS
SPCC

Capacity Gallons/Liters	Product Diameter x H	Dimensions		Model No	Ship Wt lb/kg
		Folded W x L x H			
20/76	28 in x 11 in 711 mm x 279 mm	18 in x 12 in x 3 in 457 mm x 305 mm x 76 mm		28319	2/1
66/250	51 in x 11 in 1295 mm x 279 mm	18 in x 16 in x 6 in 457 mm x 406 mm x 152 mm		28321	6/3
100/379	54 in x 11 in 1372 mm x 279 mm	24 in x 24 in x 3 in 610 mm x 610 mm x 76 mm		28323	11/5
150/568	65 in x 11 in 1651 mm x 279 mm	24 in x 24 in x 5 in 610 mm x 610 mm x 127 mm		28325	14/6



Free survey helps you address environmental concerns . . .

Not sure which spill control solution is right for you? Justrite's free **STUD-E™** survey can ensure proper protection and compliance—visit justritemfg.com to learn more and sign-up.

Flexible Containment

Water-Filled Boom Diverters **NEW**

Temporarily divert and control fluid for easy cleanup or recovery

Use the water filled booms in storm water management, portable washdown/pressure washing diversion, spill diversion, and equipment and personnel decontamination. Flexible PVC film construction conforms to uneven surfaces such as asphalt or concrete to form a diversionary barrier away from storm drains or as a holding area for wet vacuum operations. Features easy-open push plug for filling with standard water hose.

Helps comply with EPA for stormwater regulations.



Product W x L	Dimensions		Model No	Ship Wt lb/kg
	Folded W x L x H			
9 in x 5 ft 229 mm x 1.5 m	6 in x 12 in x 3 in 152 mm x 305 mm x 76 mm		28450	2/1
9 in x 10 ft 229 mm x 3.0 m	6 in x 14 in x 4 in 152 mm x 356 mm x 102 mm		28452	3/1
9 in x 25 ft 229 mm x 7.6 m	10 in x 18 in x 6 in 254 mm x 457 mm x 152mm		28454	6/3
9 in x 50 ft 229 mm x 15.2 m	10 in x 18 in x 6 in 254 mm x 457 mm x 152mm		28456	12/5



Redirect liquids away from work areas and storm drains.

Water-Filled Drain Covers **NEW**

Ensure regulatory compliance and prevent run-off pollutants from entering stormwater drains

Deploy cover as a preventative measure to seal drains before washdowns, maintenance, or other cleanup tasks that may allow contaminants into nearby water systems. Features easy-open push plug for filling with standard water hose. Order a cover size that overlaps drain opening at least 6-in (152-mm) on each edge. To prevent edges from losing contact with ground surface, do not fill over 5-in (127-mm) in height. Long-lasting durable modified vinyl construction resists damage caused by UV rays.

Helps comply with EPA for stormwater regulations.

Product W x L	Dimensions		Model No	Ship Wt lb/kg
	Folded W x L x H			
30 in x 30 in 762 mm x 762 mm	15 in x 15 in x 3 in 381 mm x 381 mm x 76 mm		28468	5/2
42 in x 42 in 1067 mm x 1067 mm	16 in x 18 in x 4 in 406 mm x 457 mm x 102 mm		28470	10/5
42 in x 66 in 1067 mm x 1676 mm	16 in x 18 in x 6 in 406 mm x 457 mm x 152 mm		28472	13/6
58 in x 58 in 1473 mm x 1473 mm	29 in x 29 in x 5 in 737 mm x 737 mm x 127 mm		28474	16/7



28468

Waterproof Tarps **NEW**

Protect drums and equipment to avoid contamination or damage

- Brass grommets in corners offer a convenient way to secure the tarp in place.

Shield equipment from the harsh effects of direct sunlight, sand, dust, and rain with these protective covers. Waterproof, lightweight vinyl coated fabric reduces the effect of the environment. Use under berm products to provide additional puncture and wear-resistance.

Product W x L	Dimensions		Model No	Ship Wt lb/kg
	Folded W x L x H			
5 ft x 5 ft 1.5 m x 1.5 m	18 in x 16 in x 6 in 457 mm x 406 mm x 152 mm		28432	6/3
5 ft x 10 ft 1.5 m x 3.0 m			28434	8/4
10 ft x 10 ft 3.0 m x 3.0 m			28436	15/7
10 ft x 12 ft 3.0 m x 3.7 m			28438	20/9
10 ft x 20 ft 3.0 m x 6.1 m		18 in x 16 in x 14 in 457 mm x 406 mm x 356 mm		28439



Keep drums clean from dirt and debris.

28432

Flexible Containment



Improve wear resistance and extend the life of your berm by adding track runners.

Ground Protection Accessories **NEW**

Improve berm longevity without sacrificing functionality

Ground Mats – Create a smooth, uniform deployment area with this heavy-duty woven fabric. Place under berm for improved wear resistance against rocks and construction debris.

Track Mats – Position inside the berm for extra protection along tire paths. Thick durable, black woven fabric protects the floor and walls from tire abrasion caused by skidding, turning, and braking.

Track Runners – Place this high visibility, yellow vinyl coated fabric inside the berm for moderate protection against tire abrasion.



28356 Ground Mat



28348 Track Mat



28340 Track Runner

Description	6-ft (1.8-m) Length		10-ft (3.0-m) Length		16-ft (4.9-m) Length		28-ft (8.5-m) Length		56-ft (17.1-m) Length	
	Model No	Ship Wt lb/kg	Model No	Ship Wt lb/kg	Model No	Ship Wt lb/kg	Model No	Ship Wt lb/kg	Model No	Ship Wt lb/kg
6-ft (1.8-m) Wide Ground Mat	28338	16/7	28344	76/35	28350	89/40	28356	113/51	28362	173/79
3-ft (0.9-m) Wide Track Mat	28336	10/5	28342	14/6	28348	72/33	28354	85/39	28360	114/52
3-ft (0.9-m) Wide Track Runner	28334	6/3	28340	8/4	28346	16/7	28352	16/7	28358	28/13

Note: Ground protection accessories are typically used to protect against tires and should be ordered in quantities of two.

Berm Repair Kits **NEW**

Repair lightly damaged berms

Use to repair berms having small holes, abrasion points, and small tears to maintain fluid-tight reliability and compliance.

- Heat Gun and Nozzle (some models)
- Pressure Application Roller
- Sand Paper
- Scissors and Utility Knife
- PVC Cement
- 10-square feet of coated fabric repair material

Note: Heat gun may not be compatible with local electrical connections.



Description	Use to repair these products	Model No with heat gun	Model No without heat gun	Ship Wt lb/kg
		Modified Vinyl Repair Kit	Rigid-Lock QuickBerm® Plus, Rigid-Lock QuickBerm®, and the Mini-Berm Flex Tray	
PVC Coated Fabric Repair Kit	Rigid-Lock QuickBerm® Lite, Decon QuickBerm®, Maintenance Spill Berm, and Pop-Up Pool	28330	28329	

Structured Containment

EcoPolyBlend™ Accumulation Centers and Ramp

Combine units to create your own customized spill-control system

Low-profile centers only measure 5.5-inches (140-mm) high for easy handling of drums. Made with 100% recycled polyethylene, these accumulation centers are nearly impervious to chemicals, including acids and corrosives. Seamless construction eliminates leaks, making them ideal for drum filling and dispensing operations. Self-locating grates won't ride-up, and are removable for easy cleaning. Combine 2-, 4-, 6-, and 8-drum modular units to create your own customized system. Use the optional joining clips to firmly lock units together. Sumps remain separate and clips can be removed for easy repositioning. Also available in non-recycled yellow color.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.

Use optional Sump-to-Sump™ drain kit (includes joining clips and transfer tube) for applications requiring a continuous sump. Kit allows you to join centers together, on-site, for full compliance with regulations when sump capacities reach 71-gallons (270-liters). Kit includes one pair stainless steel joining clips, one pair rubber grommets, one polytetrafluoroethylene (PTFE) transfer tube. (Patent No US 6,622,879,B1)


Companion Ramp

Load and unload heavy drum with ease. Anti-skid ribs provide maximum safety. Place the ramp anywhere on accumulation centers size 2-drum or larger.



Modular design lets you join centers together to fit your space and application.

Build your own customized system!

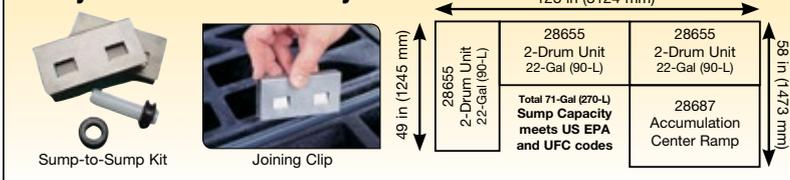

Black models - 100% recycled content. Independently green validated by UL Environment.

Yellow models have 45% recycled content



- 3 - 28655 2-Drum Unit
- 1 - 28687 Ramp
- 2 - 28927 Sump-to-Sump™ Drain Kits



28652



28659



Description	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
1 drum center	12/45	1250/567	25 x 25 x 5.5 in 635 x 635 x 140 mm	—	28653	28652	17/8
2 drum center	24/90	2500/1134	49 x 25 x 5.5 in 1245 x 635 x 140 mm		28655	28654	32/15
4 drum center	49/185	5000/2268	49 x 49 x 5.5 in 1245 x 1245 x 140 mm		28657	28656	61/28
6 drum center	73/276	7500/3402	73 x 49 x 5.5 in 1854 x 1245 x 140 mm	E,S,0	28659	28658	91/41
8 drum center	98/371	10,000/4536	97 x 49 x 5.5 in 2464 x 1245 x 140 mm		28661	28660	122/55
Ramp for above		1000/455	48 x 33 x 6.25 in 1219 x 838 x 159 mm		28687	28650	41/19
Joining clips, one pair, stainless steel	—	—	4 x 2 in 102 x 51 mm	—	28926	—	1/0.5
Sump-to-Sump™ drain kit			—		28927		

EcoPolyBlend™ Replacement Grates (100% recycled)

2 drum grate for all sizes except 1 drum			24 x 48 x 2.5 in 610 x 1219 x 63 mm	—	28259	—	16/7
1 drum grate for 1 drum unit and 3 drum In-line			24 x 24 x 2.5 in 610 x 610 x 63 mm		28260		8/4

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

Structured Containment



Use pallet as a workstation for waste collection.

EcoPolyBlend™ Spill Control Pallets

Keep workers safe from accidental slips indoors and avoid costly hazmat cleanup costs

- Protect against ground contamination.
- Comply with EPA and avoid potential fines.

Made of molded 100% recycled polyethylene, these pallets resist chemical attack from hazardous acids, caustics and solvents. The oversized sump holds the contents of up to a 55-gallon (200-liter) drum in the event of leak or rupture—meeting or exceeding the most stringent spill containment regulations. Seamless construction eliminates leaks. Self-locating grates lift off for quick cleanup. Black color hides grime and dirt to keep your workplace looking clean. Choose from square or in-line configurations. Also available in non-recycled yellow color.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



28634



28627



28623




Black models - 100% recycled content.
Independently green validated
by UL Environment.

Yellow models have 45% recycled content



28631



28635 with 28688 ramp



Description	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
2 drum in-line pallet	66/250	2500/1134	49 x 25 x 18 in	E,S,O	28623	28622	44/20
2 drum in-line pallet w/drain			1245 x 635 x 457 mm		28625	28624	
3 drum in-line pallet	75/284	3750/1701	73 x 25 x 11.625 in		28627	28626	58/26
3 drum in-line pallet w/drain			1854 x 635 x 295 mm		28629	28628	
4 drum in-line pallet	75/284	5000/2268	97 x 25 x 9 in		28631	28630	77/35
4 drum in-line pallet w/drain			2464 x 635 x 229 mm		28633	28632	
4 drum square pallet	73/276	5000/2268	49 x 49 x 10.25 in		28635	28634	70/32
4 drum square pallet w/drain			1245 x 1245 x 260 mm		28637	28636	
Ramp for 28635	—	1000/454	49 x 33 x 10.50 in 1245 x 838 x 267 mm	—	28688	28620	40/18

EcoPolyBlend™ Replacement Grates (100% recycled)

2 drum grate for all sizes above	24 x 48 x 2.5 in 610 x 1219 x 63 mm	—	28259	—	16/7
1 drum grate for 3 drum In-line	24 x 24 x 2.5 in 610 x 610 x 63 mm		28260		8/4

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

Structured Containment

EcoPolyBlend™ DrumSheds™

Safe, secure, and compliant outdoor storage for drums

Weather resistant DrumSheds™ are made of eco-friendly, 50% recycled polyethylene. Convenient roll top doors allow access from front or rear. A wide, 52-inch (1321-mm) door opening accepts palletized loads. Fully compliant, leakproof pallet sump has removable, durable deck grating for easy cleanup of spills. A spacious interior offers ample headroom for adding funnels or pumps. Safety features include grounding capability, integral anchor bolt locations for wind resistance, and molded lugs to accept padlocks for security. Forklift pockets at the front and back make it easy to relocate empty sheds. Ships fully assembled. Pallets (without shed) also available.

Low Line Pallets (without shed) also available. Two-drum and 4-drum sizes feature ergonomic, low 9-in (229-mm) working height.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



Easily roll drums into a DrumShed™ for storage.



Independently green validated by UL Environment.



28676 (closed)

28676

Description	Recycled Content	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
2 drum DrumShed™	50%	67/254	2500/1134	60.75 x 58.50 x 75.25 in 1543 x 1486 x 1911 mm	E,S,0	28675	292/133
4 drum DrumShed™		79/301	5000/2268	60.75 x 68.50 x 75.25 in 1543 x 1740 x 1911 mm		28676	343/156
Ramp	100% - Black 0% - Yellow	—	1000/455	48 x 59.75 x 11.25 in 1219 x 1518 x 286 mm	—	28679 -Black 28678 -Yellow	65/30
Low Line Pallet - 2 drum	100%	67/254	2500/1134	55 x 45 x 9 in 1397 x 1143 x 229 mm	E,S,0	28672	68/31
Low Line Pallet - 4 drum		79/301	5000/2268	55 x 55 x 9 in 1397 x 1397 x 229 mm		28673	89/40

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

Steel Spill Containment Pallets

Use rugged, high sump capacity pallets for industrial applications

Constructed of 11-gauge hot rolled steel and strengthened with formed edging, these rugged pallets feature generous sump capacities and are 100% leakproof. Galvanized steel bar grating removes for easy cleaning and keeps drums out of overflow. Large forklift pockets 8.375-in W x 3.875-in H (213-mm W x 98-mm H) make relocation easy. Available in corrosion resistant blue powder-coat or galvanized steel finishes.

Description	Sump Capacity Gallons/Liters	Load-bearing Capacity lb/kg	External Dim. W x D x H	Compliance	Blue Model No	Galvanized Model No	Ship Wt lb/kg
2 drum pallet	72/273	1200/544	47.25 x 37.50 x 16.3125 in 1200 x 800 x 414 mm	E,S,0,I,A	28610	28611	165/75
4 drum in-line pallet	102/386	2400/1089	94.125 x 31.50 x 13.0625 in 2391 x 800 x 332 mm		28612	28613	305/138
4 drum square pallet	77/291	2400/1089	47.25 x 47.25 x 13.0625 in 1200 x 1200 x 332 mm		28614	28615	215/98



28611



28614



28612



Structured Containment



Outdoor design features lockable, dual-access roll-top doors and includes reach pole for easy closure.

EcoPolyBlend™ IBC Pallet and IBC Shed

Reliable spill protection and safe storage for IBCs

- Compliant storage for popular 275- or 330-gal (1000 or 1250-liter) IBCs.
- Compact footprint with ergonomic working height.

Constructed of durable 40% recycled polyethylene, these intermediate bulk container pallets offer excellent chemical resistance. Accepts IBCs up to 48-in W x 48-in D x 53-in H (1219-mm W x 1219-mm D x 1346-mm H). Large leakproof sump exceeds regulations and protects against high volume spills. Sturdy pillar supports accept up to 9,000-lb (4082-kg) uniformly distributed load. Removable pillars make for easy sump cleanup. Pallet features forklift pockets for relocation when empty. Ships fully assembled.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



Independently green validated
by UL Environment.



28674



28674



Description	Recycled Content	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
IBC indoor pallet	40%	372/1408	9000/4082	55 x 55 x 37.50 in 1397 x 1397 x 952 mm	E,S,0	28674	357/162
IBC outdoor shed w/pallet				60.75 x 68.50 x 103.75 in 1543 x 1740 x 2635 mm		28677	621/282
Replacement Reach Pole				1.125 dia x 60 in L 28 dia x 1524 mm L	—	28690	3/2

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

EcoPolyBlend™ Spill Trays

Lightweight and low-profile design for small-scale spill control

Made of 100% recycled polyethylene, these eco-friendly spill trays will not rust or corrode. Raised rib bottom adds rigidity and keeps contents out of spills—perfect for pouring and filling applications. Rated for service temperatures between -30° to 120°F (-34 to 49°C).

Sump Capacity Gallons/Liters	External Dim. W x D x H	Nominal Interior Dim W x D x H	Model No	Ship Wt lb/kg
12/45	46 x 16 x 5.50 in 1168 x 406 x 140 mm	40.375 x 10.375 x 4.875 in 1026 x 264 x 124 mm	28715	4/2
20/75	38 x 26 x 5.50 in 965 x 660 x 140 mm	32.375 x 20.375 x 4.875 in 822 x 518 x 124 mm	28716	5/2
	47.50 x 23 x 5.50 in 1207 x 584 x 140 mm	41.875 x 17.375 x 4.875 in 1064 x 441 x 124 mm	28717	6/3
23/87	37.75 x 34 x 5.50 in 959 x 864 x 140 mm	31.875 x 28.375 x 4.875 in 810 x 721 x 124 mm	28718	
29/109	47 x 33 x 5.50 in 1194 x 838 x 140 mm	41.375 x 27.375 x 4.875 in 1051 x 695 x 124 mm	28719	8/3



28718



28716



28719

Structured Containment

EcoPolyBlend™ Spill Containment Caddy

Get convenient handling, dispensing and built-in spill containment—all in one product!

- Rubber, 10-in (254-mm) wheels roll over bumpy terrain—use indoors or out.
- Single-piece, double-walled seamless design eliminates leaks.

This portable unit with wheels allows one person to easily transport a full 55-gallon (200-liter) drum. Ergonomic design with tilt/stop feature minimizes back strain. Two tension straps hold a drum securely in place. A 66-gallon (250-liter) spill sump contains chemical spills, eliminating hazards and hassles. Exclusive open-view sump design makes cleanup simple and quick. Durable 90% recycled polyethylene construction provides maximum corrosion resistance and leakproof protection. Also, available in non-recycled yellow color.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.




Two-wheeled design makes for easy transport.



Black models - 90% recycled content.
Independently green validated
by UL Environment.

Yellow models have no recycled content

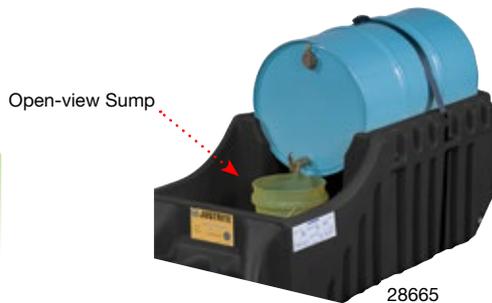

28665



Description	Sump Capacity Gallon/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
Indoor/outdoor caddy	66/250	1250/567	32 x 72 x 26 in 813 x 1829 x 660 mm	E,S,0	28665	28664	125/57

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

EcoPolyBlend™ Spill Control Funnels

An eco-friendly, cost-effective way to collect liquids and keep drum tops clean

Use these funnels with any closed-head 30- and 55-gallon (110-and 200-liter) drums. Low-profile, wide diameter opening makes it for quick, easy pouring. Scalloped, sloped design minimizes splashes and prevents containers from resting in their own liquids. Large, flat well at the throat of funnel allows for passive draining of paint tins, filters, buckets and other containers.

Funnel for flammable liquids includes a drum fill vent with brass flame arrester, threaded bung cap with tight seal, and pressure relief valve for high temperatures. Molded-in hook stores optional funnel cover.



Wide diameter opening allows for quick and easy pouring.

Description	Sump Capacity Gallons/Liters	OD x H	Compliance	Model No	Ship Wt lb/kg
Funnel for nonflammables	2.50/9	21 x 3.25 in	0	28680	5/2
Funnel for flammables		533 x 83 mm		28681	7/3
Cover for funnel 28680		19 x 3.25 in	—	28682	5/2



100% recycled content.
Independently green validated
by UL Environment.

Structured Containment



EcoPolyBlend™ drum management system combines efficient drum storage and positive spill control.

EcoPolyBlend™ Drum Management System

Organize drums for maximum efficiency, productivity and cost-savings

Space-saving, stackable design stores up to four 30- and/or 55-gallon (110- and/or 200-liter) drums of Class 1B or 1C flammables and combustibles or nonhazardous liquids. 100% recycled molded polyethylene construction provides maximum chemical resistance—preventing corrosion, deterioration and leaks. Molded-in drum lock-channels hold drums in place. The system consists of three parts: a base module, stack module and dispensing shelf.

The Base Module holds two drums with a 3060-lb (1388-kg) total load capacity. Easily relocate the base module with a forklift when empty. The 66-gallon (250-liter) open-view containment sump makes it easy to spot any spills for a quick cleanup.

The Stack Module holds two additional drums to double the system capacity for a load of 1500-lb (680-kg). When storing both 30- and 55-gallon (110- and 200-liter) drums, the smaller drums should be placed on the top of the stack module.

The Dispensing Shelf has a load capacity of 60-lb (27-kg), and mounts securely to the stack module for convenient dispensing from the upper level.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



Black models - 100% recycled content.
Independently green validated
by UL Environment.

Yellow models have no recycled content



28667 Base



28667 Base • 28669 Stacker with strap • 28671 Shelf



Drum vents provide pressure relief . . .

Whether storing drums horizontally or vertically, Justrite has the solution for safely relieving dangerous drum pressure—visit justritemfg.com for details.



Description	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance	Model No Black	Model No Yellow	Ship Wt lb/kg
Base module	66/250	3060/1388	49 x 59 x 26 in 1245 x 1499 x 660 mm	E,S,0	28667	28666	138/63
Stack module	—	1500/680	49 x 46 x 12 in 1245 x 1168 x 305 mm	—	28669	28668	70/32
Dispensing shelf	—	60/27	19.50 x 18.75 x 16.50 in 495 x 476 x 419 mm	—	28671	—	12/5

*Service temperature range: -30°F to 120°F (-34°C to 49°C)

Structured Containment

Overpack/Salvage Drums

Approved for the transportation of hazardous materials

- Polyethylene drums are DOT/UN certified to the highest “X” rating for Packing Groups I, II, and III solids up to 750-lb (340-kg).

These dual-purpose drums are DOT/UN approved for use as a salvage drum for dry hazardous materials, or as secondary containment for solids or liquids with a 95-gallon (360-liter) sump capacity. Durable 100% polyethylene construction is chemical and weather resistant to withstand the rigors of land, air and sea transportation. Twist-on threaded lid makes closure safe and easy. Simply use a forklift to relocate the drums. Units nest when empty for compact storage. Select from yellow or black polyethylene.



28201



28203



Durable construction withstands the rigors of transportation.

Description	Recycled Content	Sump Capacity Gallons/Liters	Outside Dim. OD x H	UN Cert. No	Compliance	Model No	Ship Wt lb/kg
Overpack/salvage drum; yellow	None	95/360	31 x 43.25 in 787 x 1099 mm	1H2/X340/S	DOT/UN	28201	47/21
Overpack/salvage drum; black						28203	

EcoPolyBlend™ Single- and Double-Drum Collection Centers

All-weather construction stands up to the harshest environments

Chemical-resistant 100% recycled polyethylene offers effective and economical spill control for 55-gallon (200-liter) drums. Forklift channels allow for easy relocation (when empty). Lids include lock to prevent unauthorized access.

EPA compliant, supports SPCC, and meets NFPA 1 2009 edition and IFC fire codes.



28685 with funnel 28680 on 28270 steel dolly



28683, Dual covers open separately for convenient access to either drum.



Description	Sump Capacity Gallons/Liters	Outside Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
Double-drum collection center	180/681	60 x 39 x 47 in 1524 x 991 x 1194 mm	E,S,0	28683	108/49
Single-drum collection center	66/250	33 top dia x 31.75 in 838 top dia x 806 mm		28685	44/20
Steel drum dolly for single drum	—	fits 28685	—	28270	14/6

Recycling



Use Aerosolv® anywhere you find aerosol cleaners, adhesives, and lubricants.

Aerosolv® Aerosol Can Disposal System

Safely recycle aerosol cans while reducing disposal costs and minimizing waste

- Save thousands of dollars on hazardous waste disposal costs.
- Turn aerosol cans into recyclable steel—save on landfill space for a cleaner environment.

The Aerosolv® system safely converts spent aerosol cans from solid hazardous waste to a non-hazardous material. It accepts industry standard sized cans with a maximum height of 8½-in (215-mm) and threads directly into a standard 2-in (51-mm) bung on a 30- (110-liter) or 55-gallon (200-liter) drum. Body is made of low maintenance aluminum and all moving parts are 308 stainless steel. A non-sparking pin punctures the can, and the residual liquids flow into the collection drum. One 55-gallon (200-liter) drum holds approximately 4,200 spent aerosol cans. Punctured, discharged, cans do not meet the definition of hazardous waste per EPA 40 CFR 261.23(a)(6), and thus can be treated as recyclable scrap metal.

Attach the two-part combination filter to the 3/4-in (19-mm) bung to filter VOCs from any residual propellants. The bottom coalescing cartridge transforms residual liquids into droplets that collect in the reservoir of the cartridge and safely drain into the drum. The top activated carbon filter cartridge indicates saturation and serves as a replacement reminder. Economical, non color-changing filter is also available. System includes a combination filter, safety goggles, and an anti-static ground wire with alligator clip. EPA compliant.

Color Changing Filter



28224

28223

Non-Color Changing Filter



28197

28198



Description	Shipping Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
Aerosolv®	18 x 18 x 7 in 457 x 457 x 178 mm	E	28202	12/5

Accessories	Model No
Counter Accessory for any Aerosolv® Unit	28225
Color Changing Combination Coalescing/Carbon Filter	28224
Color Changing Activated Carbon Cartridge (2pk)	28223
Combination Coalescing/Carbon Filter (non-color changing)	28197
Activated Carbon Cartridge (2pk) (non-color changing)	28198
Aerosolv® Maintenance Repair Kit (for use with any Aerosolv®) Includes: 1 non-sparking puncture pin with O-rings 1 Aeroprene (polychloroprene) gasket 1 Spring 3 bridge pins 1 tube of grease	28200
Replacement Aeroprene (polychloroprene) gasket	28111
Replacement poly sleeve	28181

†Coalescing filter can only be purchased in combination with a carbon filter.

Note: With the 28202 Aerosolv® unit you must leave the last aerosol can punctured and drained clamped in the unit to maintain a closed container as defined by OSHA.



28225

Retrofit your existing #28202 Aerosolv® with #28225 Counter for easy recordkeeping.



Collect empty aerosol cans in open-head drums . . .

Popular Cease-Fire® open-head drums are made of durable steel and come in sizes up to 55-gallon (200-liter)—a great way to collect cans for recycling! Visit justritemfg.com for details.

Recycling

Aerosolv® Super System

Certified by the EPA's Environmental Technology Verification Program (ETV)

- Built-in counter tracks number of cans punctured.
- Protective coating for easy cleaning.

Aerosolv® Super System offers all the features of the original Aerosolv® system plus greater vapor reduction, easy tracking, and added security. Lockout and shut-off mechanism seals the system and drum when not in use to eliminate the escape of hazardous vapors to meet OSHA requirements. Easily comply with your ISO 14001 program using the built-in counter. Includes a combination coalescing/saturation indicating carbon filter, a padlock with key, anti-static ground wire with C-clamp, and safety goggles.

EPA compliant and ETV certified.



Description	Shipping Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
Aerosolv® Super System with Counter	18 x 18 x 7 in 457 x 457 x 178 mm	E,V	28230	12/5
Color Changing Combination Coalescing/Carbon Cartridge with auto shut-off valve	6 x 6 x 16 in 152 x 152 x 406 mm	—	28228	3/1
Replacement Color Changing Activated Carbon Cartridge (2 pack)			28229	5/2



Built-in counter is a great tool for easy adherence to your ISO 14001 program.

Aerosolv® Dual-Compliant System

Designed to comply with California's vapor emission regulation SB1158

Aerosolv® Dual-Compliant System includes all the great features of the Aerosolv® Super System plus a shut-off valve in the puncturing unit and a check valve in the carbon cartridge to prevent off-gassing. A poly lid cover and a poly containment sump help you stay compliant whether you are accumulating or transporting processed aerosol cans for scrap. Includes a combination coalescing/saturation indicating carbon filter, a padlock with key, antistatic ground wire with C-clamp, and safety goggles.

EPA compliant and ETV certified.



Description	Shipping Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
Aerosolv® Dual Compliant Can Disposal System with Counter	27 x 27 x 10 in 457 x 457 x 178 mm	E,V	28231	21/10

Note: See replacement filters above.



28231

Prosolv® System

Safely and economically convert gas cylinders into recyclable steel containers

The Prosoolv® System removes the sealing sleeve and internal valve stem from propane, MAPP, and 3/4-in (19-mm) male threaded calibration gas cylinders (do not use with oxygen bottles). It empties and filters propellants from cylinders converting them into non-hazardous recyclable material.

EPA compliant.



Description	Shipping Dim. W x D x H	Compliance	Model No	Ship Wt lb/kg
*Prosoolv® Includes: vent device, carbon filter, antistatic wire, safety goggles, sleeve removal tool, and 40 certification tags	15 x 11 x 7 in 381 x 279 x 178 mm	E	28190	8/4
Replacement filter with 40 tags	6 x 6 x 9 in 152 x 152 x 229 mm	—	28191	3/1
Replacement sleeve removal tool	5 x 6 x 4 in 127 x 152 x 102 mm	—	28192	1/0.5



28190

Sorbents



Easily wipe grimy, small parts with handy sorbent pads.

Universal Sorbents

Absorb spills of water- or petroleum-based fluids and keep your workplace clean and safe from slip accidents

For everyday cleanup of drips, leaks and spills around workbenches, pipes, and machinery. Polypropylene fibers absorb up to 25 times their weight. Use for liquids such as hydraulic oil, antifreeze, gasoline, acetone, or other water-based fluids. Use pre-cut pads for wiping operations or small spills. Convenient perforated rolls are suitable for larger areas including workstations and walkways.

Bonded sorbents with dimpled surface for increased tensile strength quickly soak up liquids.


Fine Fiber low-lint sorbents provide gripping power for walkways and help control equipment leaks and oversprays. Suitable for wiping applications.

Laminated SMS sorbents provide virtually lint-free use with sensitive tools and in rugged wiping applications.

Drum Top Pad soaks up drips from collection or dispensing operations. Pre-cut bung holes fit 55-gallon (200-L) drums.



83056

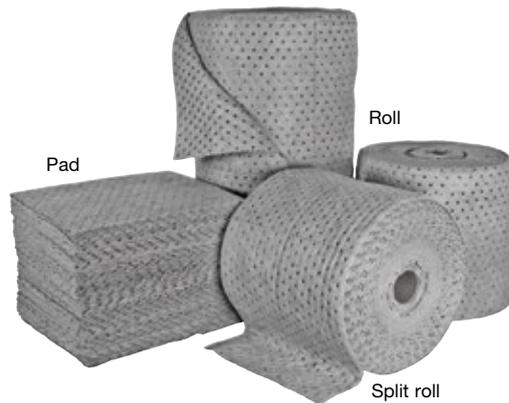

Description	Weight Type	Nominal Dimensions W x D	Absorbency Capacity Gallons/Liters	No of Pieces and Pack	Ship Wt lb/kg	Model No
Bonded						
Bonded universal pads	Heavy	15 x 17 in (381 x 432 mm)	32/121	100 / bag	11/5	83002
	Light			200 / bag	13/6	83006
Bonded universal rolls	Heavy	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	24/11	83008
Bonded universal split rolls	Medium	15 in x 150 ft (381 mm x 46 m)		2 / bag		19/9
Fine Fiber						
Fine fiber universal pads	Heavy	15 x 17 in (381 x 432 mm)	32/121	100 / bag	15/7	83016
	Light			200 / bag		83020
Fine fiber universal rolls	Heavy	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	31/14	83022
Fine fiber universal split rolls	Medium	15 in x 150 ft (381 mm x 46 m)				51/193
	Heavy	15 in x 150 ft (381 mm x 46 m)	62/235	2 / bag	28/13	83026
Laminated SMS						
Laminated SMS universal pads	Heavy	15 x 17 in (381 x 432 mm)	32/121	100 / bag	11/5	83028
	Light			200 / bag		13/6
Laminated SMS universal rolls	Heavy	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	24/11	83034
Laminated SMS universal split rolls		15 in x 150 ft (381 mm x 46 m)		2 / bag		83038
Drum Top Pad						
Universal drum top pad	Heavy	22 in dia (559 mm)	10/38	25 / bag	5/2	83056

Sorbents

Oil Only Sorbents

Fast, effective cleanup of oil spills on land or water

Hydrophobic polypropylene fibers absorb and retain petroleum-based liquids without absorbing water, making them ideal for liquids like motor oil, transmission fluids, transformer oil, and drilling and cutting fluids. Sorbents float indefinitely and remain intact when fully saturated. White color helps identify saturation. Available in handy pre-cut pads or perforated rolls.

Meltblown sorbents offer the most economical liquid control.

Bonded sorbents feature ultrasonically bonded points, fusing fibers together for increased tensile strength.

Fine Fiber sorbents offer high absorption strength and gripping power, with two layers of polypropylene bonded around a high-loft meltblown core.

Laminated SMS resists abrasions and are low-lint to prevent contamination to sensitive parts.



Use sorbent rolls to clean up workstation floors and reduce potential accidents.



Description	Weight Type	Nominal Dimensions W x D	Absorbency Capacity Gallons/Liters	No of Pieces and Pack	Ship Wt lb/kg	Model No
Meltblown						
Meltblown oil only pads	Heavy	15 x 17 in (381 x 432 mm)	32/121	100 / bag	11/5	83202
	Light		16/61		7/3	83206
Meltblown oil only rolls	Heavy	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	24/11	83210
	Medium		51/193		19/9	83212
Meltblown oil only split rolls	Heavy	15 in x 150 ft (381 mm x 46 m)	62/235	2 / bag	24/11	83214
	Medium		51/193		19/9	83216
Bonded						
Bonded oil only pads	Heavy	15 x 17 in (381 x 432 mm)	32/121	100 / bag	11/5	83218
	Light		16/61		8/4	83222
Bonded oil only rolls	Heavy	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	24/11	83226
	Medium		51/193		19/9	83228
Bonded oil only split rolls	Heavy	15 in x 150 ft (381 mm x 46 m)	62/235	2 / bag	24/11	83230
	Medium		51/193		19/9	83232
Fine Fiber						
Fine fiber oil only pads	Heavy	15 x 17 in (381 x 432 mm)	32/121	100 / bag	15/7	83234
	Light		16/61		9/4	83238
Fine fiber oil only rolls	Heavy	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	31/14	83242
	Medium		51/193		21/10	83244
Fine fiber oil only split rolls	Heavy	15 in x 150 ft (381 mm x 46 m)	62/235	2 / bag	31/14	83246
	Medium		51/193		21/10	83248
Laminated SMS						
Laminated SMS oil only pads	Heavy	15 x 17 in (381 x 432 mm)	32/121	100 / bag	11/5	83250
	Light		16/61		7/3	83254
Laminated SMS oil only rolls	Heavy	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	24/11	83258
	Medium		51/193		19/9	83260
Laminated SMS oil only split rolls	Heavy	15 in x 150 ft (381 mm x 46 m)	62/235	2 / bag	24/11	83262
	Medium		51/193		21/10	83274

Sorbents



Sorbent socks mold easily around the ledge of machinery, absorbing leaking oils and overspray.

Specialty Sorbents

Various styles and contents for indoor and outdoor applications

Universal Socks & Pillows contain a blend of polypropylene and cellulose recycled fibers to help fulfill environmental initiatives. Because they contain a blend of material, do not use with acids, bases or unknown liquids. Use socks around large spills to prevent spreading, or mold around machine bases. Pillows offer high volume spill cleanup in tight spaces.

Oil Only Socks, Pillows, and Booms are made of 100% polypropylene. They absorb oil but repel water; ideal for use on waterborne spills. Wrap socks around leaky outdoor equipment. Pillows soak up oil in ponds, basins, and tanks. Non-toxic, non-shedding floating booms include rope and snap links for linking together for quick deployment in waterways.

Hazmat Pads, Rolls, Socks, and Pillows soak up acids and bases. Made of surfactant-treated polypropylene, they are ideal for unknown liquids; they won't react with aggressive chemicals and solvents. High visibility colors quickly identify hazardous conditions.



Description	Nominal Dimensions W x D	Absorbency Capacity Gallons/Liters	No of Pieces and Pack	Ship Wt lb/kg	Model No
Universal					
Universal socks	3 in x 4 ft (76 mm x 1 m)	66/250	40 / box	28/13	83048
	3 in x 10 ft (76 mm x 3 m)	60/227	15 / box	25/11	83050
Universal pillows	11 x 13 in (279 x 330 mm)	23/87	16 / box	8/4	83052
	10 x 10 in (254 x 254 mm)	35/132	40 / box	6/3	83054
Oil Only					
Oil only socks	3 in x 4 ft (76 mm x 1 m)	22/83	12 / box	8/4	83268
	3 in x 10 ft (76 mm x 3 m)	20/76	4 / box	7/3	83270
Oil only pillows	10 x 10 in (254 x 254 mm)	42/160	24 / box	6/3	83272
Oil only booms	5 in x 10 ft (127 mm x 3 m)	33/125	4 / bag	14/6	83264
	8 in x 10 ft (203 mm x 3 m)	71/269		34/15	83266
Hazmat					
Hazmat pads - heavy weight	15 x 17 in (381 x 432 mm)	32/121	100 / bag	11/5	83402
Hazmat pads - light weight			200 / bag	13/6	83404
Hazmat rolls - heavy weight	30 in x 150 ft (762 mm x 46 m)	62/235	1 / bag	24/11	83406
Hazmat split rolls - heavy weight	15 in x 150 ft (381 mm x 46 m)		2 / bag		83408
Hazmat socks	3 in x 4 ft (76 mm x 1 m)	22/83	12 / box	6/3	83410
	3 in x 10 ft (76 mm x 3 m)	20/76	4 / box	8/4	83412
Hazmat pillows	18 x 24 in (457 x 610 mm)	40/151	10 / box	10/5	83414
	16 x 18 in (406 x 457 mm)	44/167	17 / box	17/8	83416

Sorbents

Spill Kits

UN certified containers filled with universal, oil only or hazmat sorbents provide quick response to any size spill

20-gallon (76-L) Spill Kits open with a twist of the lid for quick spill cleanup. Portable size allows for multiple placements at different workstations.

Contents:

- 25 – 15-in x 17-in (381- x 432-mm) pads
- 4 – 3-in x 4-ft (76-mm x 1-m) socks
- 2 – 10-in x 10-in (254- x 254-mm) pillows
- 1 pair of safety goggles, 1 pair of disposable gloves, 1 shovel,
- 1 Emergency Response book, 1 disposal bag.

50-gallon (189-L) Wheeled Spill Kits Kits provide portability for average sized spills. Chemical, weather resistant polyethylene construction with large 40-in (152-mm) wheels make them easy to move anywhere, indoors or out.

Contents:

- 50 – 12-in x 13-in (305- x 330-mm) wipes
- 50 – 15-in x 17-in (381- x 432-mm) pads
- 5 – 3-in x 4-ft (76-mm x 1-m) socks
- 5 – 3-in x 10-ft (76-mm x 3-m) socks
- 4 – 10-in x 10-in (254- x 254-mm) pillows
- 1 Emergency Response book, 5 drum liners.

95-gallon (360-L) Spill Kits contain enough supplies to respond to larger scale accidents. Durable, 100% polyethylene resists rust and corrosion, keeping contents dry and ready for use. High visibility color saves valuable response time for site cleanup.

Contents:

- 100 – 15-in x 17-in (381- x 432-mm) pads
- 10 – 10-in x 10-in (254- x 254-mm) pillows
- 4 – 5-in x 10-ft (127-mm x 3-m) booms
- 2 pairs of safety goggles, 2 pairs of disposable gloves,
- 1 shovel, 10 disposal bags.



Kits strategically positioned throughout a facility provide fast, emergency response to dangerous spills.



83676

83632

83632

Description	Sorbent Type	Nominal Dimensions Top Diameter x H	UN Certification No	Absorbency Gallons/Liters	No of Pieces and Pack	Ship Wt lb/kg	Model No
Spill kit 20 gallon (76 L)	Universal	22.25 x 19 in 565 x 483 mm	1H2/X75/S 1H2/Y100/S	19/72	1 kit	28/13	83632
	Oil only						83634
	Hazmat						83636
Spill kit 50 gallon (189 L)	Universal	23 x 45 in 584 x 1143 mm	1H2/X125/S	41/155	1 kit	45/20	83672
	Oil only						83674
	Hazmat						83676
Spill kit 95 gallon (360 L)	Universal	31 x 41.5 in 787 x 1054 mm	1H2/X295/S	86/326	1 kit	105/48	83652
	Oil only						83654
	Hazmat						83656

SAFETY & STORAGE CABINETS

Justrite® Sure-Grip® EX Safety Storage Cabinets offer top performance for flammable liquid storage and protection.

EXtra safe, EXtra sturdy, EXtra secure

Fusible links hold doors wide open and melt at 165°F (74°C) for automatic closure (on self-closing models).

Sturdy 18-gauge (1-mm) double wall steel construction with 1-1/2-in (38-mm) of insulating air space.

Easy-close, self-latching doors; U-Loc™ handle (shown below) does not require manual rotation to engage mandatory three-point latch.

Fully welded, not riveted, construction holds squareness for longer life and offers greater protection in a fire since air gaps are reduced.

Continuous piano hinge provides smooth closure.

Durable and chemical-resistant, lead-free powder-coat paint finish, inside and out, retains high gloss look and minimizes the effects of corrosion and humidity.

Dual vents with built-in flash arresters strategically placed at bottom and opposite top.




45-gallon (170-liter) self-close door style

Concealed self-close mechanism provides obstruction-free access to top shelf space. Self-indexing doors guarantee they will close in sequence and ensure a tight closure from top to bottom (on self-closing models). Patent pending

Patented SpillSlope® safety shelves direct spills to back and bottom of leakproof sump. Adjustable on 3-in (76-mm) centers, they meet ANSI standards with a 350-lb (159-kg) safe allowable load.

Welded shelf hangers interlock with shelf to offer maximum “nonslip” stability with no flimsy brackets to lose.

2-in (51-mm) leakproof containment sump holds leaks and meets EPA requirements.




Adjustable leveling feet make it easy to balance cabinets on uneven surfaces.



Built-in grounding connector (on outside side panel) for easy grounding. Shown here with optional ground wire 08500.



Complies with OSHA 29 CFR 1910.106 and NFPA Code 30, section 9.5.3; FM Approved



Stainless steel, 3-point bullet self-latching system provides easy, fail-safe, positive door closure with increased heat resistance. Patent pending



Easily secure your contents—U-Loc™ handle includes double key set or can be padlocked (not included) for greater security. Patent pending



Patented SpillSlope® safety shelves direct spills to back and bottom of leakproof sump; adjust on 3-in (76-mm) centers for versatile storage. Meets ANSI MH28.1



Welded construction holds squareness for long life; door astragal provides extra sturdiness.



Highly visible HazAlert™ reflective label provides warning—“Flammable – Keep Fire Away” in English, Spanish, and French.

for Flammables

How to Select A Safety Cabinet

Size and type of container:

Determine if you are storing safety cans, 30- and 55-gallon (110- and 200-L) drums, smaller paint cans, 1 quart (4-L) bottles, aerosols, dispenser cans or other containers.

Capacity:

Select specialty cabinets for on-the-spot needs; larger cabinets for expanded or large quantity storage.

Type of chemical:

Easily identify, organize and segregate liquids by using the correct color cabinets.



Yellow for flammable liquids



Red for paints, inks, and other combustible liquids



Blue for corrosives and hazardous liquids



Green for pesticides and insecticides



Silver or neutral colors for laboratory settings



White, beige or gray for waste or outdoor lockers

Door style

Select from **manual** or **self-closing** door style cabinets. Cabinets with self-closing doors provide an extra measure of protection. Since the human element of remembering to close the door is neutralized by the automatic closing feature.

Manual

Economical manual-close doors permit doors to open a full 180 degrees. When pushed closed they will automatically self-latch.



Self-Close

This style self-indexes and self-latches to automatically shut doors upon release. Mechanism is concealed in the top wall, maximizing available shelf space. Fusible links hold doors open during use. In the event of a fire, fusible links will melt at 165°F (74°C) to automatically close doors.



Concealed mechanism



Fusible link

How to maintain a cabinet

Always store chemicals in closed containers. Clean up spills promptly. Be sure cabinet is level and located indoors in a well ventilated, low humidity environment. Never drill into a cabinet wall—this will negate the FM approval. Ensure cabinet doors are fully operational—that they properly close and engage the three-point latch.



SAFETY & STORAGE CABINETS

for Flammables



Using multiple cabinets helps you organize and segregate dangerous liquids.

Sure-Grip® EX Safety Cabinets for Flammables

Safety cabinets offer safe, dependable flammable liquid storage and protection

Protect workers, reduce fire risks, and improve productivity by storing flammable fuels and chemicals in code-compliant safety cabinets. Designed to meet OSHA and NFPA 30 standards, Sure-Grip® EX cabinets are constructed of sturdy 18-gauge (1-mm) thick double-wall, welded steel with 1-1/2-in (38-mm) of insulating air space for fire resistance. High-performance, self-latching doors close easily and securely for maximum protection under fire conditions. Fail-safe closing mechanism ensures three-point stainless steel bullet latching system works every time.

For added security, U-Loc™ handle comes with a cylinder lock and key set or accepts an optional padlock.

Haz-Alert™ reflective warning labels are highly visible under fire conditions or during power outages when illuminated with a flashlight.

Patented SpillSlope® galvanized steel shelves direct spills to back and bottom of a leakproof sump. They adjust on 3-in (76-mm) centers for versatile storage. Cabinets also feature a leakproof 2-in (51-mm) bottom sump, dual vents with flame arresters, four adjustable self-leveling feet, grounding connector and trilingual warning label. Durable lead-free epoxy/polyester powder-coat finish provides excellent chemical resistance.

All cabinets are FM-approved and come with a ten-year warranty.

Self-closing models also meet NFPA 1 and the International Fire Code. They shut and latch automatically when a fusible link melts at 165°F (74°C) under fire conditions. Unique, concealed self-closing mechanism offers obstruction-free access to contents.



8945001



8945201



8930001



8960001



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Sump Capacity Gallons/Liters	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior						
30/114	2 door, manual	44 x 43 x 18 in	39.625 x 39.5 x 14.562 in	1	5.2/19.7	FM,N,O,A	8930001	231/105	29937
	2 door, self-close	1118 x 1092 x 457 mm	1006 x 1003 x 370 mm			FM,N,O,A,I	8930201	238/108	
45/170	2 door, manual	65 x 43 x 18 in	60.5 x 39.5 x 14.562 in	2	8.3/31.5	FM,N,O,A	8945001	311/141	
	2 door, self-close	1651 x 1092 x 457 mm	1537 x 1003 x 370 mm			FM,N,O,A,I	8945201	313/142	
60/227	2 door, manual	65 x 34 x 34 in	60.5 x 30.75 x 30.34 in	2	10.7/40.6	FM,N,O,A	8960001	388/176	29944
	2 door, self-close	1651 x 864 x 864 mm	1537 x 781 x 771 mm			FM,N,O,A,I	8960201	392/178	
90/341*	2 door, manual	65 x 43 x 34 in	60.5 x 39.5 x 30.34 in	2	10.7/40.6	FM,N,O,A	8990001	481/218	29945
	2 door, self-close	1651 x 1092 x 864 mm	1537 x 1003 x 771 mm			FM,N,O,A,I	8990201		

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454L) of Category 4 flammable liquids may be stored in a safety cabinet.

for Flammables

Sure-Grip® EX Countertop and Compac Safety Cabinets

Store flammables safely even when available space is at a minimum

These cabinets are ideal when storing lesser quantities of flammable liquids at a workstation or adding to existing storage capacities.

Mini Cabinet offers the smallest footprint for easy mobility on service vehicles, carts and maintenance trikes. Includes 3 bungee cords to keep contents in place during movement.

Countertop Safety Cabinets allow increased access to frequently used liquids, without compromising safety. Portable size keeps work areas flexible. Use optional wall hanger assembly for wall mounting.

Compac Safety Cabinets fit almost anywhere and provide protection even where space is at a premium. Only 23-1/4-in (591-mm) wide, they hold a full 12- or 15-gallons (45- or 57-L) of flammables.



Place cabinets near points-of-use to save time by not going to a far away central storage area.



10 Year
Limited Warranty

Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior					
Aerosols	mini; 1 door, manual	22 x 17 x 8 in 559 x 432 x 203 mm	12.25 x 13.75 x 4.75 in 309 x 350 x 121 mm	1	N,O,A	8902001	43/19	—
4/15	countertop; 1 door, manual	22 x 17 x 17 in 559 x 432 x 432 mm	18.5 x 13.75 x 13.75 in 470 x 349 x 349 mm			8904001	62/28	29935
	countertop; 1 door self-close				N,O,A,I	8904201		
12/45	compac; 1 door manual	35 x 23.25 x 18 in 889 x 591 x 457 mm	30.5 x 20 x 14.56 in 775 x 508 x 370 mm		FM,N,O,A	130/59	29936	
	compac; 1 door self-close				FM,N,O,A,I			8912201
15/57	compac; 1 door manual	44 x 23.25 x 18 in 1118 x 591 x 457 mm	39.625 x 20 x 14.56 in 1006 x 508 x 370 mm		FM,N,O,A	8915001	154/70	
	compac; 1 door self-close				FM,N,O,A,I	8915201	156/70	

Sure-Grip® EX Piggyback Safety Cabinets

Expand storage and safely segregate liquids

Create a safe storage for flammables without taking up valuable floor space. Designed to mount on top of 30- and 45-gallon (114- and 170-L), manual or self-closing Sure-Grip® EX cabinets on page 45. They can also be used independently as a benchtop cabinet or stacked to provide additional storage. Turn it into a wall-mount cabinet with by ordering a wall hanger assembly 25950.



8917001

FM
APPROVED
10 Year
Limited Warranty

Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior					
12/45	2 door, manual	18 x 43 x 18 in 457 x 1092 x 457 mm	13 x 39.5 x 14.56 in 330 x 1003 x 370 mm	0	FM,N,O,A	8913001	128/58	—
	2 door, self-close				FM,N,O,A,I	8913201		
17/64	2 door, manual	24 x 43 x 18 in 610 x 1092 x 457 mm	19.5 x 39.5 x 14.56 in 495 x 1003 x 370 mm	1	FM,N,O,A	8917001	157/71	29937
	2 door, self-close				FM,N,O,A,I	8917201		

Optional Wall Hanger Assembly

Description	Model No	Ship Wt lb/kg
Wall hanger assembly	25950	7/3.0



Reduce harmful vapors in cabinets . . .

Protect employees from inhalation exposure to VOCs—see page 51 for the VaporTrap™ Cabinet Filter.

for Flammables



Place Slimline cabinet where floor space is limited.

Sure-Grip® EX Slimline Safety Cabinets

Gain valuable storage space even when space is tight

Use alone or alongside larger cabinets for expanded storage when floor space is limited. The standard slimline cabinet is 18-in (457-mm) deep and fits flush alongside a 45-gallon (170-L) cabinet. The deep slimline cabinet is 34-in (864-mm) deep and fits alongside a 60- or 90-gallon (227- or 341-L) cabinet. Both cabinets measure only 23-1/4-in (591-mm) wide.

Slimline safety cabinets have all the same features as the larger safety cabinets such as a three-point, self-latching door with self-latching handle, a 2-in (51-mm) leakproof sump, dual vents, a grounding wire connector and large trilingual warning label identifying contents. Cabinets include three SpillSlope® galvanized steel shelves that direct spills to back and bottom into a leakproof sump.



8922001

8954001



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior					
22/83 (standard)	1 door, manual	65 x 23.25 x 18 in 1651 x 591 x 457 mm	60.5 x 20 x 14.56 in 1537 x 508 x 370 mm	3	FM,N,O,A	8922001	198/90	29936
	1 door, self-close				FM,N,O,A,I	8922201		
54/204 (deep)	1 door, manual	65 x 23.25 x 34 in 1651 x 591 x 864 mm	60.5 x 20 x 30.31 in 1537 x 508 x 771 mm		FM,N,O,A	8954001	300/136	29941
	1 door, self-close				FM,N,O,A,I	8954201		

Sure-Grip® EX Wall-Mount Safety Cabinets

Make the most of usable storage space

—hang cabinet above workbench for easy access

Gain storage space near work areas without taking up extra floor space. Eye-level positioning allows for easy access to solvents. Model 8934001 features five adjustable shelves to accommodate multiple containers. Both sizes come complete with mounting hardware.



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior					
17/64	2 door, manual	24 x 43 x 18 in 610 x 1092 x 457 mm	19.5 x 39.5 x 14.56 in 495 x 1003 x 370 mm	1	N,O,A	8917008	153/69	—
20/76		44 x 43 x 12 in 1118 x 1092 x 305 mm	39.56 x 39.5 x 8.75 in 1006 x 1003 x 222 mm	5	FM,N,O,A	8934001	205/93	29938

Sure-Grip® EX Undercounter Safety Cabinets

Conveniently locate liquids near work areas

Take advantage of undercounter space to safely store flammable liquids. Each cabinet is sized and fitted with a 3-1/2-in H x 2-1/2-in D (89-mm x 64-mm) toe kick to mount flush with other cabinets. Dual vents with flash arresters on the back wall provide for an easy connection if ventilation is needed. Self-leveling feet adjust to 1-1/8-in (29-mm) for alignment on uneven floors.



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior					
22/83	2 door, manual	35 x 35 x 22 in 889 x 889 x 559 mm	27.31 x 31.75 x 18.75 in 695 x 806 x 476 mm	1	FM,N,O,A	8923001	190/86	29939
	2 door, self-close				FM,N,O,A,I	8923201	205/93	


for Flammables

Sure-Grip® EX Corner Safety Cabinet **NEW**

Maximize corner space while retaining full storage capacity

Designed especially for environments where space is at a minimum, this cabinet fits nicely into an empty corner to maximize the amount of space available for storage. Improve efficiency by locating materials near point-of-use and get the most out of limited floor space. Available in 30- (114-L) and 45-gallon (170-L) capacities, with both manual and self-closing door styles, Sure-Grip® EX corner safety cabinets help to increase maximum allowable quantities of flammable and combustible liquids in control areas.

Designed to meet OSHA, NFPA 30, and NFPA 1 standards, corner safety cabinets have all of the same features as the classic line of flammable safety cabinets including a fail-safe, three-point self latching door, double-walled construction with 1-1/2-in (38-mm) air space, dual vents, a grounding connector and a large trilingual warning label identifying contents. Patented Spillslope® galvanized steel shelves direct spills to the back and bottom of a leakproof 2-in (51-mm) sump.

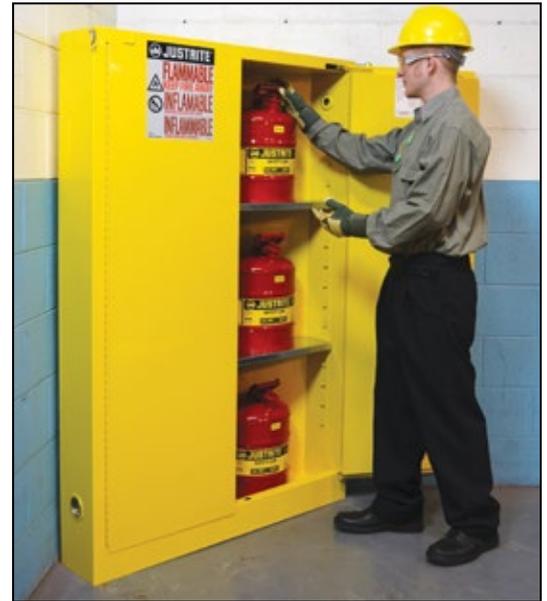

Safely store nine 5-gal (19-ltr) safety cans with room to spare.



8946001



Storing hazardous materials? . . .

Identify and safely store acids, bases, oxidizers, or toxic materials — see pages 54-55 for a wide variety of cabinet sizes.



8946201



8931201



10 Year
Limited Warranty

Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adjustable Shelves	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
		Exterior	Interior				
30/114	2 door, manual-close	44 in x 43 in x 21.75 in 1118 x 1093 x 552 mm	40.125 x 39.5 x 18.375 in 1019 x 1003 x 467 mm	1	N,O,A	8931001	207/94
30/114	2 door, self-close			1	N,O,A,I	8931201	212/96
45/170	2 door, manual-close	65.25 x 43 x 21.75 in 1657 x 1093 x 552 mm	61 x 39.5 x 18.375 in 1549 x 1003 x 467 mm	2	N,O,A	8946001	284/129
45/170	2 door, self-close			2	N,O,A,I	8946201	287/130

for Flammables



Ninety minutes of fire protection provides high level of safety when point-of-use storage is required.



90-Minute EN Safety Storage Cabinets **NEW**


Extreme fire resistance for high risk environments—store flammables with 90-minutes of protection

- EN, OSHA and NFPA compliant—Independently fire tested and approved by FM Approvals and MPA Dresden.
- Hybrid-close door action—manual close doors stop in any position, but self close in the event of a fire to protect contents.
- Security—independent cylinder locks on each door includes locking state indicator (red/green).

Constructed using multiple layers of fire-resistant gypsum and mineral fiber insulation, cabinet body has a rugged powder coated steel exterior that provides excellent corrosion resistance. Under fire conditions, intumescent strips expand and hermetically seal all gaps to reduce heat entering the cabinet, providing 90-minutes of content protection and extended evacuation time. Hybrid style doors open or close manually and include a damper that adjusts the force needed to move the doors. In the event of a fire, the built-in fusible link system releases to allow automatic closure of doors at 122°F (50°C). Cabinets are EN compliant, FM-approved and meet NFPA 30, NFPA 1, and OSHA standards.

Powder-coat finish steel shelves adjust on 1-1/4-inch (32-mm) increments and have a load capacity of 165-lbs (75-kgs). Shelves with 1-inch (30-mm) high ledge prevent small containers from easily sliding off. Removable bottom sump with detachable perforated insert features a 3-sided lip seal to ensure leaks or spills from shelves are captured at the bottom of the 3-in (76-mm) sump, keeping containers stored in the sump clean and dry.

Haz-Alert™ reflective tri-lingual warning labels are highly visible under fire conditions or during power outages when illuminated with a flashlight. Cabinets also feature adjustable leveling feet, an integrated transport base for easy repositioning (base cover optional), and mandatory air vents per EN 14470-1. Vent butterfly valve closes securely at 158°F (70°C) in the event of a fire. Vents include flame arresters and caps for FM compliance.

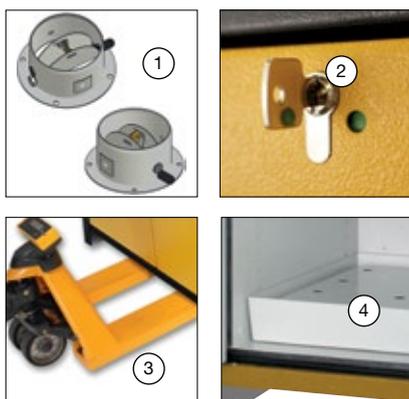

1. Two top vents with butterfly valve close automatically at 158 °F (70°C) under fire conditions. Sidewalls inside the cabinet feature upper and lower black air grids with integrated ducts that connect to top vents.
2. Independent cylinder locks on each door includes locking state indicator (red/green).
3. Integrated transport base accepts pallet jack for easy repositioning of empty cabinets. Accepts optional, removable base cover.
4. Removable sump with separate detachable perforated insert allows spills to flow into sump for easy cleaning, and keeps containers elevated to stay clean and dry. Bright interior provides maximum visibility in low light conditions to quickly identify contents.



22605



22607 with optional base cover 22637



Fire Rating (Minutes)	Capacity Gallons/Liters (5 Gallon Can)	Maximum Capacity* (1 Liter Bottle)	Number of Doors and Style	Dimensions H x W x D		Adjustable Shelves	Approv/Lstg Regulation	Model No	Ship Wt lb/kg
				Exterior	Interior				
90	30/114	168	2 door, hybrid-close	76.89 x 35.16 x 24.21 in 1953 x 893 x 615 mm	64.85 x 29.5 x 20.55 in 1647 x 750 x 522 mm	3	FM,EN,N,O,A	22605	840/381
	45/170	264		76.89 x 46.97 x 24.21 in 1953 x 1193 x 615 mm	64.85 x 41.34 x 20.55 in 1647 x 1050 x 522 mm			22607	1016/461

* Achieved through the use of additional shelves, maximum capacity is an estimate and may vary depending upon container size. Check with local authority for maximum allowable quantity restrictions.

for Flammables



30-Minute EN Safety Storage Cabinets **NEW**

Safely store and segregate flammables—30 minutes of extreme fire-resistance

- EN, OSHA and NFPA compliant—Independently fire tested and approved by FM Approvals and MPA Dresden.
- Hybrid-close door action—manual close doors stop in any position, but self close in the event of a fire to protect contents.

Designed to provide 30-minutes of fire resistance, attractive two-toned yellow cabinet is constructed with a body of melamine resin and flame retardant special plates, and a steel door front covered by a textured, durable powder-coat finish. Under fire conditions, special intumescent protection strips expand and seal hermetically to close gaps between the door(s) and frame to reduce heat entering the cabinet. Hybrid style door(s) operate manually and stop in any position, but in the event of a fire, the built-in fusible link system will melt and release to allow automatic closure of door(s) at 122°F (50°C). Cabinets are EN compliant, FM-approved and meet NFPA 30, NFPA 1, and OSHA standards.

Cabinets have many of the same features as the 90-minute model, including leakproof, removable bottom sump with perforated insert, adjustable powder-coat finish steel shelves with 1-inch (30-mm) lip and load capacity of 165-lbs (75-kgs), Haz-Alert™ warning label, and a ground connection. Air vents close securely at 158°F (70°C) in the event of a fire and include flame arresters and caps. Independent cylinder lock on door(s) provides added security. Bright interior color offers maximum visibility to stored goods. Integrated transport base makes it easy to reposition empty cabinets. Accepts removable base cover (optional).



Position single-door extreme fire resistance cabinets where space is limited. Easily add a second cabinet if storage needs increase.




Cabinet mover helps transport cabinets easily through doorways and spaces where a pallet jack is not practical.



22601




22603 with optional base cover 22635



22632

22631



22633

22634



Fire Rating (Minutes)	Capacity Gallons/Liters (5 Gallon Can)	Maximum Capacity* (1 Liter Bottle)	Number of Doors and Style	Dimensions H x W x D		Adjustable Shelves	Approval/Lstg Regulation	Model No	Ship Wt lb/kg
				Exterior	Interior				
30	30/114	168	1 door, hybrid-close	76.65 x 34.02 x 24.41 in 1947 x 864 x 620 mm	64.02 x 29.5 x 20.44 in 1626 x 750 x 519 mm	3	FM,EN,N,O,A	22601	507/230
	45/170	264	2 door, hybrid-close	76.65 x 45.83 x 24.41 in 1947 x 1164 x 620 mm	64.02 x 41.34 x 20.44 in 1626 x 1050 x 519 mm			22603	622/282

* Achieved through the use of additional shelves, maximum capacity is an estimate and may vary depending upon container size. Check with local authority for maximum allowable quantity restrictions.

Extra Accessories

Description	Fits Cabinet Styles	Dimensions	Model No	Ship Wt lb/kg
Steel shelf, powder-coated	30 and 90 Minute - 30 gallon (114 L)	W x D: 29.21 x 17.3 in (742 x 435 mm)	22630	15/7
	30 and 90 Minute - 45 gallon (170 L)	W x D: 41.02 x 17.3 in (1042 x 435 mm)	22631	11/5
Polypropylene tray	30 and 90 Minute - 30 gallon (114 L)	H x W x D: 3.47 x 29.13 x 17.09 in (88 x 740 x 434 mm)	22632	6/3
Polyethylene tray	30 and 90 Minute - 45 gallon (170 L)	H x W x D: 1.97 x 40.95 x 16.93 in (50 x 1040 x 430 mm)	22633	
Base cover	30 Minute - 30 gallon (114 L)	H x W: 3.43 x 30.95 in (87 x 786 mm)	22634	5/2
	30 Minute - 45 gallon (170 L)	H x W: 3.43 x 42.76 in (87 x 1086 mm)	22635	7/3
	90 Minute - 30 gallon (114 L)	H x W: 3.35 x 32.21 in (85 x 818 mm)	22636	3/2
	90 Minute - 45 gallon (170 L)	H x W: 3.35 x 44.02 in (85 x 1118 mm)	22637	4/2
Cabinet mover - Set of 2	30 and 90 Minute - 30 & 45 gallon (114 & 170 L)	H x W x D: 3.54 x 5.51 x 23.62 in (90 x 140 x 600 mm)	22638	20/9

SAFETY & STORAGE CABINETS

for Flammables, Tools & More



UV-protected powdercoat paint finish for long wearing protection.

Safesite™ Combo Safety Chest **NEW**

Provide safe, secure storage for flammables along with tools and other valuables

Protect flammables from ignition sources, misuse or theft by storing them in a specially designed Safety Chest. It provides protected storage of fuels, paint thinners, solvents, or other flammables typically found at construction and utility jobsites.

Top quality features include heavy-duty, 16-gauge welded steel body finished in a tough UV-protected powdercoat paint that stands up to abusive conditions. Fire resistant 16-gauge steel safety compartment liner with 18-gauge lid provides double walled protection—accepts 5-gallon (19-L) Justrite safety cans. Designed with dual security, Safesite™ provides superior protection from unauthorized access. Dual security—outside lid offers padlock security while inside compartment features U-Loc™ technology.



Description	Exterior Dimensions H x W x D		Model No	Ship Wt lb/kg
	Exterior	Interior		
Safesite™ Combo Safety Chest	29.5 x 48 x 24 in 749 x 1219 x 610 mm	lg: 21 x 30.5 x 23.75 in 533.5 x 775 x 603 mm	16036	196/90
		sm: 18 x 12.25 x 21 in 457 x 311 x 533.5 mm		

Accessories

Description	Dimensions	Load Capacity (kg)	Model No	Ship Wt lb/kg
4 Heavy-duty casters (2-locking)	5 in dia x 1.5 in width	2000 lb (907)	16043	17/8
4 casters (2-locking)	127 x 38 mm	1120 lb (508)	16044	303/137
Set of two No. 5 Master Locks			50963A	4/2

Document Storage Boxes

Keep your important papers readily available while protecting them from moisture and dirt

Safely store manuals and documents in these weather-resistant polyethylene storage boxes. Each box is bright red for high visibility and features a smooth area for labels. Use the label pack provided that includes two blank labels and labels printed "SDS" and "Instruction Manual". Boxes come with heavy-duty double-sided tape for easy installation. Large size accepts SDS binder; medium and large sized units accept padlock when security is a concern.



23306



23303



23304



23305



Description	Approx Interior Dimensions H x W x D	Exterior Dimensions H x W x D	Lock Hole Dia	Single Unit		Master Carton Packs		
				Model No	Ship Wt lb/kg	Qty Per Master Ctn	Model No	Ship Wt lb/kg
Medium top opening	11.5 x 8.75 x 1.625 in 292 x 222 x 41 mm	12.5 x 10.25 x 2.25 in 318 x 260 x 57 mm	0.25 in/6 mm	S23303	2/1	20	23303	35/16
Medium front opening	12.25 x 8.625 x 1 in 311 x 219 x 25 mm	14.5 x 11 x 2.125 in 368 x 279 x 54 mm	0.375 in/10 mm	S23304	3/1.5		23304	42/19
Tube twist on lid	12 x 3 Dia in 305 x 76 Dia mm	12.5 x 3.75 OD in 318 x 94 OD mm	—	S23305	1/0.5		23305	11/5
Large front opening	13.25 x 10.75 x 2.25 in 337 x 273 x 57 mm	15.75 x 13.125 x 3.625 in 400 x 333 x 90 mm	0.375 in/10 mm	S23306	4/2	10	23306	33/15
Label pack (4 yellow labels: 2 blank and 2 printed - SDS and instruction manual)			—	—	—	20	23310	11/5

Accessories for Safety Cabinets


VaporTrap™ Safety Cabinet Filter

Improves your work environment by reducing employee's inhalation exposure to VOC's

Install a VaporTrap™ Filter to reduce harmful VOC vapors inside your safety cabinets. Activated carbon filter medium contained in a stainless steel mesh cartridge adsorbs the volatile organic chemical vapors from cabinets storing flammable liquids. Sturdy 4-in x 5-1/2-in (102-mm x 139-mm) magnetized base offers flexible placement anywhere within the cabinet. Date notation area on label serves as a reminder for replacement; life cycle varies based upon vapor types and concentrations.

Description	Nom. Dimensions Filter L x D	Model No	Ship Wt lb/kg
VaporTrap™ Filter (2 pk.)	8.75 x 2.25 in (222 x 57 mm)	29916	4/2

Note: Due to variables such as the chemical itself, its purity or its vapor pressure, temperature, humidity, charcoal age, etc., it is difficult to estimate VOC vapor adsorption rates. The Justrite VaporTrap™ Carbon Filter is not intended to be used as a substitute for using safe closed containers as required by OSHA and the EPA. It is important to clean up spills and residues from the cabinet and containers.

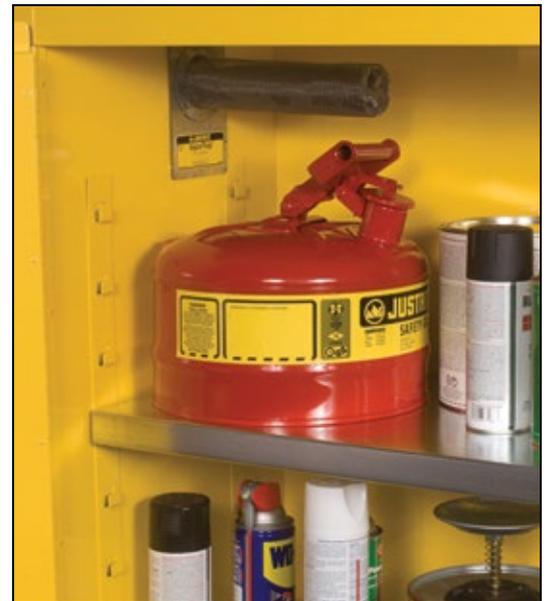

For increased safety, position one or two VaporTrap™ Filters anywhere inside the cabinet.

Safety Cabinet Accessories


Accessories offer organization and convenience

Steel Shelf Dividers fit all Justrite cabinets with 14-in (355-mm) deep shelves and come in a set of four. Simply place over shelf and slide into position as desired.

Leg Riser Frame provides sturdy, stable support for easy relocation of empty cabinet with forklift or pallet jack. High leg frame makes it easy to clean underneath and keeps cabinet away from floor moisture. Includes leg levelers and safety warning label "Forklift Only When Empty." Frame fits Justrite cabinets with footprint of 43-in W x 18-in D (1092-mm x 457-mm).

Rolling Cart makes it easy to move a heavy safety cabinet—transport solvents and chemicals directly to your work area. All welded 1/8-in (3-mm) thick heavy-duty steel with reinforced corners provides superior durability. Large 5-in (127-mm) poly caster wheels feature brakes for added safety. Ergonomic 1-1/4-in (31.75-mm) push handle is removable. Frame fits any cabinet with footprint of 43-in W x 18-in D (1092-mm x 457-mm) with a maximum height of 44-in (1118-mm).

Seismic Bracket Kit provides increased stability—ideal for earthquake or hurricane prone areas. One kit secures any safety cabinet to a wall or floor. Because there are no holes created, the fire protection properties of the cabinet remain intact and the cabinet maintains FM approval.

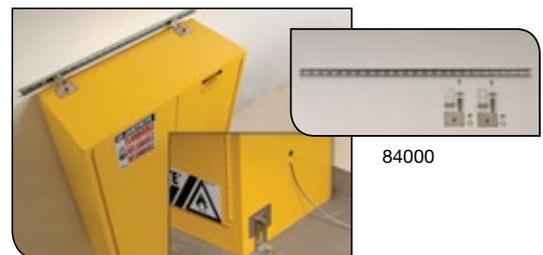

Description	Load Capacity lb/kg	Dimensions H x W x D	Model No	Ship Wt lb/kg
Shelf dividers for 30G/114L, 40G/151L, 45G/170L, 12G/45L & 15G/57L compact, 22G/83L slimline and 17G/64L piggyback	—	2 x 2.03125 x 14.1719 in (51 x 52 x 360 mm)	29985	5/2
Leg riser frame for 30G/114L and 45G/170L	1000/454	5.25 x 43.75 x 18.75 in (133 x 1111 x 476 mm)	84002	31/14
Rolling cart for 30G/114L and piggyback style	500/227	42 x 43.25 x 18.25 in (1066 x 1099 x 464 mm)	84001	37/17
Seismic bracket kit fits all cabinet sizes	—	4 x 48 x 4 in (102 x 1219 x 102 mm)	84000	7/3

Drum Safety Cabinets for Flammables



Spacious design allows cabinet to be used as a pumping station.

Sure-Grip® EX Vertical Drum Safety Cabinets

Safely store solvent filled drums

Use these vertical drum safety cabinets to safely store 30- to 55-gallon (110- to 200-L) drums. The removable, adjustable, half-depth shelf provides enough head space to accommodate a drum with a pump or funnel so the cabinet can be used as a pumping or waste accumulation station, and also allows you to store Class III materials or spare accessories. Available with or without roller assemblies to easily move heavy drums. FM approved.



8962001
(shown with optional rollers 25920)



Drum Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior					
One - 55/200	2 door, manual	65 x 34 x 34 in 1651 x 864 x 864 mm	60.5 x 30.75 x 30.34 in 1537 x 781 x 771 mm	1	FM,N,O,A	8962001	397/180	29946
Two - 55/200*		65 x 59 x 34 in 1651 x 1499 x 864 mm	60.5 x 86.5 x 30.34 in 1537 x 2197 x 771 mm		N,O,A	8991001	611/277	29947
Two - 30/110	2 door, manual with drum rollers	65 x 43 x 34 in	60.5 x 39.5 x 30.34 in		FM,N,O,A	8990601	496/225	—
	2 door, self-close with drum rollers	1651 x 1092 x 864 mm	1537 x 1003 x 771 mm		FM,N,O,A,I	8990701		

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454L) of Category 4 flammable liquids may be stored in a safety cabinet.

Sure-Grip® EX Horizontal Drum Safety Cabinets

Use for drum storage or as a dispensing station

Safely house horizontal drums for use in gravity-flow dispensing applications. The interior provides space for a drip-can and includes tracks to guide drum cradle (sold separately below) into position. FM approved.



8993201 (shown with
optional cradle 08800)



Drum Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg
		Exterior	Interior			
One - 55/200	2 door, manual	50 x 30 x 48 in 1270 x 762 x 1219 mm	46.375 x 27 x 44.75 in 1178 x 686 x 1137 mm	FM,N,O,A	8993001	370/168
	2 door, self-close			FM,N,O,A,I	8993201	

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454L) of Category 4 flammable liquids may be stored in a safety cabinet.

Ramp and Accessories for Drum Cabinets

Makes drum handling easier

Use the cabinet ramp to easily load drums into a cabinet using a cart. Ramp fits over the sill to keep securely in place. Tread design on surface maximizes traction. Fits all styles of Justrite drum cabinets. Load limit is 750 lb (340 kg). Not for use with wheeled drum cradle 08800.

Use drum roller for vertical storage cabinet 8962001 (sold separately above) to easily maneuver heavy drums. Use wheeled drum cradle for positioning a horizontal drum for gravity-flow dispensing.

Description	Model No	Ship Wt lb/kg
Drum cabinet ramp, 24 x 24 in (610 x 610 mm)	25932	29/13
Drum roller for single 55-gallon (200 L) vertical drum cabinet	25920	53/24
Drum cradle, 600 lb (272-kg) capacity	08800	35/16



Ramp side rails provide strength and guidance



08800

for Combustibles

Sure-Grip® EX Safety Cabinets for Combustibles

Safe storage for paints and inks

Easily separate and identify Class III combustibles using these red safety cabinets. Adjustable shelves accommodate many smaller paint tins, aerosols and inks found in printing, painting, furniture and motor vehicle operations. Cabinets feature sturdy double-wall, 18-gauge (1-mm) steel construction with 1-1/2-in (38-mm) of air space and dual flame arresting vents. Cabinets are also available in 20-, 60- and 96-gallon (76-, 227- and 363-L) sizes—ask your distributor for details.

Cabinets are FM-approved.



8930111



Multiple adjustable SpillSlope® safety shelves provide storage versatility for different sized paint cans.



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No	
		Exterior	Interior					Full Depth	Half Depth
40/151	2 door, manual	44 x 43 x 18 in	39.56 x 39.5 x 14.56 in	3	FM,N,O,A	8930111	238/108	29937	
	2 door, self-close	1118 x 1092 x 457 mm	1006 x 1003 x 370 mm		FM,N,O,A,I	8930311	254/115		

Sure-Grip® EX Double-Duty Safety Drum Cabinets

Store drum and safety cans in a single cabinet

Double-duty yellow cabinets safely store flammable liquids. They feature two separate compartments that fit one vertical 55- or 30-gallon (200- or 110-L) drum and up to twelve 5-gallon (19-L) safety cans. Cabinets feature self-latching, three-point locking door for maximum protection under fire conditions. Latching system engages automatically when the door is pushed closed.

Cabinets include drum rollers in the sump and one half-depth shelf in the drum compartment plus two full-size adjustable shelves in the can compartment. Sturdy 18-gauge (1-mm) double-wall steel construction offers excellent durability. Self-close model features a fusible link that holds doors wide open during use and melts at 165°F (74°C), allowing the doors to close automatically in the event of a fire.



8992601 ← 591-mm → ← 778-mm →



Drum Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No	
		Exterior	Interior				Full Depth	Half Depth
115/435*	2 door, manual with rollers	65 x 59 x 34 in 1651 x 1499 x 864 mm	sm: 60.5 x 23.25 x 30.375 1537 x 591 x 771 mm	N,O,A	8992601	694/315	29974	29946
	2 door, self-close with rollers		lg: 60.5 x 30.625 x 30.375 1537 x 778 x 771 mm	N,O,A,I	8992701			

*OSHA 29CFR 1910.106(d)(3) states that not more than 60 gallons (227L) of Category 1, 2, or 3 flammable liquids, nor more than 120 gallons (454L) of Category 4 flammable liquids may be stored in a safety cabinet.

SAFETY & STORAGE CABINETS

for Hazardous Material



Segregate and identify hazardous materials to ensure a safe working environment.



Encased self-closing mechanism provides obstruction-free access to top shelf space. Fusible link melts at 165°F (74°C) to automatically close door(s) under fire conditions.

Safety Cabinets for Hazardous Materials **NEW**

Identify and safely store hazardous materials such as acids, bases, oxidizers, or toxic materials

High-performance cabinets feature all-welded, 18-gauge (1-mm) double-walled steel construction with 1½-inch (38-mm) air space, a 2-inch (51-mm) leakproof sump, U-Loc™ handle, dual vents with flame arresters, adjustable self-leveling feet, and ground wire connector. Application-specific labels identify contents to safely store and segregate incompatible chemicals.

Self-closing door(s) with a three-point, stainless steel bullet latching system securely close for maximum protection under fire conditions. They self-index and self-latch to close in sequence to ensure a tight closure from top to bottom.

For increased chemical resistance against leaks or drips, steel SpillSlope® adjustable shelves include a polyethylene tray that sits on top of the shelf, as well as a separate polyethylene liner for the bottom sump. The popular 30-gal (114-L) cabinet includes an extra polyethylene work tray that can be placed on top of cabinet for a handy work surface.

Cabinets are FM approved (except for 4-gal /15-L models), and come with a ten-year warranty.



10 Year
Limited Warranty

Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No		
		Exterior	Interior					w/tray	shelf	tray
Classic Safety Cabinets										
30/114	2 door, self-close	44 x 43 x 18 in 1118 x 1092 x 457 mm	39.625 x 39.5 x 14.56 in 1006 x 1003 x 370 mm	1	FM,H,A,I	8630281	240/109	29958	29937	29962
45/170	2 door, self-close	65 x 43 x 18 in 1651 x 1092 x 457 mm	60.5 x 39.5 x 14.56 in 1537 x 1003 x 370 mm	2		8645281	303/137			
60/227	2 door, self-close	65 x 34 x 34 in 1651 x 864 x 864 mm	60.5 x 30.75 x 30.34 in 1537 x 781 x 771 mm			8660281	370/168	29980	29944	29961
90/341	2 door, self-close	65 x 43 x 34 in 1651 x 1092 x 864 mm	60.5 x 39.5 x 30.34 in 1537 x 1003 x 771 mm			8690281	436/198	—	29945	29972
Countertop Safety Cabinet										
4/15	1 door, self-close	22 x 17 x 17 in 559 x 432 x 432 mm	18.5 x 13.75 x 13.75 in 470 x 349 x 349 mm	1	H,A,I	8604281	69/31	29973	29935	25934
Compac Safety Cabinets										
12/45	1 door, self-close	35 x 23.25 x 18 in 889 x 591 x 457 mm	30.5 x 20 x 14.56 in 775 x 508 x 370 mm	1	FM,H,A,I	8612281	123/56	29959	29936	29968
15/57	1 door, self-close	44 x 23.25 x 18 in 1118 x 591 x 457 mm	39.625 x 20 x 14.56 in 1006 x 508 x 370 mm			8615281	156/70			
Piggyback Safety Cabinets										
12/45	2 door, self-close	18 x 43 x 18 in 457 x 1092 x 457 mm	13 x 39.5 x 14.56 in 330 x 1003 x 370 mm	0	FM,H,A,I	8613281	132/60	—		
17/64	2 door, self-close	24 x 43 x 18 in 610 x 1092 x 457 mm	19.5 x 39.5 x 14.56 in 495 x 1003 x 370 mm	1		8617281	174/79	29958	29937	29962
Slimline Safety Cabinets										
22/83 (standard)	1 door, self-close	65 x 23.25 x 18 in 1651 x 591 x 457 mm	60.5 x 20 x 14.56 in 1537 x 508 x 370 mm	3	FM,H,A,I	8622281	211/96	29959	29936	29968
54/204 (deep)	1 door, self-close	65 x 23.25 x 34 in 1651 x 591 x 864 mm	60.5 x 20 x 30.34 in 1537 x 508 x 771 mm			8654281	314/142	—	29941	29907
Undercounter Safety Cabinet										
22/83	2 door, self-close	35 x 35 x 22 in 889 x 889 x 559 mm	27.375 x 31.75 x 18.75 in 695 x 806 x 476 mm	1	FM,H,A,I	8623281	197/89	29960	29939	29965

for Hazardous Material

ChemCor® Lined Safety Cabinets **NEW** for Hazardous Materials

Seamless ChemCor® finish protects interior cabinet surfaces from rust and corrosion

For superior protection against corrosion from drips and off-gassing from harsh chemicals, use ChemCor® lined safety cabinets. They feature a unique, flame-coated thermoplastic finish on interior doors, shelves, walls, ceiling, and sump. The non-porous, seam-free surface eliminates the need for corrosion-prone rivets or fasteners. It resists staining and cleans up easily. Popular 30-gal (114-L) cabinet includes a separate polyethylene work tray that can be placed on top of cabinet for a handy work surface.

Cabinets are FM approved (except for 4-gal/15-L models), and come with a ten-year warranty.



Store small quantities of hazardous materials at point-of-use for quick and easy access.



Label pack includes ten content specific labels.



86452821



86222821



86122821




86042821



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No
		Exterior	Interior					
Classic Safety Cabinets								
30/114	2 door, self-close	44 x 43 x 18 in 1118 x 1092 x 457 mm	39.625 x 39.5 x 14.56 in 1006 x 1003 x 370 mm	1	FM,H,A,I	86302821	251/114	29957
45/170	2 door, self-close	65 x 43 x 18 in 1651 x 1092 x 457 mm	60.5 x 39.5 x 14.56 in 1537 x 1003 x 370 mm	2		86452821	322/146	
60/227	2 door, self-close	65 x 34 x 34 in 1651 x 864 x 864 mm	60.5 x 30.75 x 30.34 in 1537 x 781 x 771 mm			86602821	400/181	
Countertop Safety Cabinet								
4/15	1 door, self-close	22 x 17 x 17 in 559 x 432 x 432 mm	18.5 x 13.75 x 13.75 in 470 x 349 x 349 mm	1	H,A,I	86042821	70/32	29930
Compac Safety Cabinets								
12/45	1 door, self-close	35 x 23.25 x 18 in 889 x 591 x 457 mm	30.5 x 20 x 14.56 in 775 x 508 x 370 mm	1	FM,H,A,I	86122821	137/62	29904
Piggyback Safety Cabinets								
12/45	2 door, self-close	18 x 43 x 18 in 457 x 1092 x 457 mm	13 x 39.5 x 14.56 in 330 x 1003 x 370 mm	0	FM,H,A,I	86132821	142/64	—
17/64	2 door, self-close	24 x 43 x 18 in 610 x 1092 x 457 mm	19.5 x 39.5 x 14.56 in 495 x 1003 x 370 mm	1		86172821	175/79	29957
Slimline Safety Cabinets								
22/83 (standard)	1 door, self-close	65 x 23.25 x 18 in 1651 x 591 x 457 mm	60.5 x 20 x 14.56 in 1537 x 508 x 370 mm	3	FM,H,A,I	86222821	211/96	29904
Undercounter Safety Cabinet								
22/83	2 door, self-close	35 x 35 x 22 in 889 x 889 x 559 mm	27.375 x 31.75 x 18.75 in 695 x 806 x 476 mm	1	FM,H,A,I	86232821	199/90	29929

for Corrosives

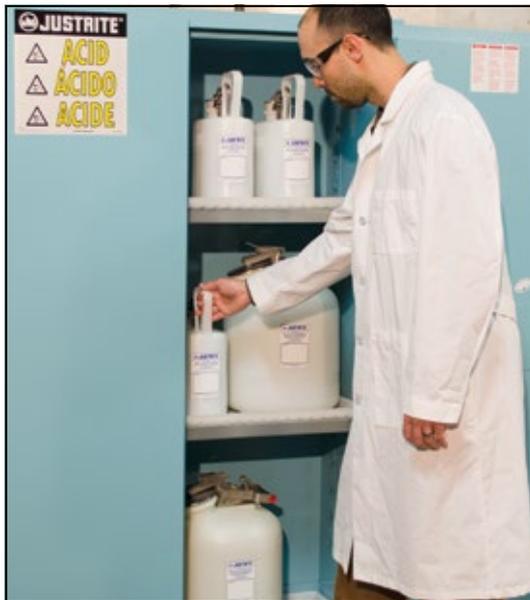

Safely store corrosives in fire-resistant steel safety cabinets.

Sure-Grip® EX Steel Classic Safety Cabinets for Corrosives

Exclusively formulated paint and poly trays resist acids, bases and solvents

Justrite blue steel safety cabinets for corrosives have the same quality safety features as the cabinets for flammables. All models come with double-wall construction, dual vents, grounding wire connections, adjustable shelves, leakproof sills, three-point self-latching doors and leveling feet. Polyethylene trays attached to galvanized steel shelves and a separate polyethylene liner for the bottom sump resist aggressive chemicals. Easily remove the liner for quick cleaning of drips and leaks. The popular 30-gallon (114-L) cabinet also includes an extra polyethylene work tray that can be secured to cabinet top for a handy work surface. An all epoxy baked-on powder-coat finish, inside and out, provides increased chemical resistance. FM approved.



8930021



8922221



8913021 on top of 8930021



10 Year
Limited Warranty

Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No			
		Exterior	Interior					w/tray	shelf	tray	
Piggyback Safety Cabinets											
12/45	2 door, manual	18 x 43 x 18 in	13 x 39.5 x 14.562 in	0	FM,A9	8913021	130/59	—	—	—	
	2 door, self-close	457 x 1092 x 457 mm	330 x 1003 x 370 mm			8913221	132/60				
17/64	2 door, manual	24 x 43 x 18 in	19.5 x 39.5 x 14.562 in	1		8917021	149/68	29958	29937	29962	
	2 door, self-close	610 x 1092 x 457 mm	495 x 1003 x 370 mm			8917221	151/69				
Slimline Safety Cabinets											
22/83	1 door, manual	65 x 23.25 x 18 in	60.5 x 20 x 14.56 in	3	FM,A9	8922021	201/91.0	29959	29936	29968	
	1 door, self-close	1651 x 591 x 457 mm	1537 x 508 x 370 mm			8922221					
Classic Safety Cabinets											
30/114	2 door, manual *	44 x 43 x 18 in	39.625 x 39.5 x 14.56 in	1	FM,A9	8930021	234/106.0	29958	29937	29962	
	2 door, self-close *	1118 x 1092 x 457 mm	1006 x 1003 x 370 mm			8930221	243110.0				
45/170	2 door, manual	65 x 43 x 18 in	60.5 x 39.5 x 14.56 in	2		8945021	315/143.0	29980	29944	29961	
	2 door, self-close	1651 x 1092 x 457 mm	1537 x 1003 x 370 mm			8945221	317/144.0				
60/227	2 door, manual	65 x 34 x 34 in	60.5 x 30.75 x 30.31 in			2	8960021				414/188.0
	2 door, self-close	1651 x 864 x 864 mm	1537 x 781 x 771 mm				8960221				425/193.0

* Includes cabinet top work tray.

for Corrosives

Sure-Grip® EX Steel Undercounter Safety Cabinets for Corrosives

Take advantage of unused undercounter space

Safely store corrosives under a workbench or lab counter for quick and easy access. These safety cabinets incorporate the same quality features as Justrite flammable cabinets but also include galvanized steel shelves with attached polyethylene trays and a separate polyethylene bottom sump liner that can be easily removed for cleaning drips and leaks. Baked-on blue epoxy powder-coat finish—inside and out—resists acids, bases and solvents for added chemical resistance. FM approved.



Self-latching doors include paddle handle with cylinder lock and keys.



Using non-flammable corrosives?
See page 7 for quick pouring, translucent polyethylene containers designed to resist acids and caustics.



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No		
		Exterior	Interior					w/tray	shelf	tray
22/83	2 door, manual	35 x 35 x 22 in	27.375 x 31.75 x 18.75 in	1	FM,A9	8923021	209/95	29960	29939	29965
	2 door, self-close	889 x 889 x 559 mm	695 x 806 x 476 mm			8923221	212/96			

Toe kick dimensions are 3.5 in (89 mm) H x 2.5 in (64 mm) D.

Sure-Grip® EX Steel Countertop and Compac Safety Cabinets for Corrosives

Easily access most frequently used fluids

Countertop and compac cabinets let you customize your work areas and make the most of available space. These specialty cabinets have the same features as our larger cabinets plus galvanized steel shelves with attached polyethylene trays and a separate polyethylene bottom sump liner that can be easily removed for cleaning drips and leaks. Baked-on blue epoxy powder-coat finish—inside and out—resists acids, bases and solvents for added chemical resistance. FM approved.



Capacity Gallons/Liters	Number of Doors and Style	Dimensions H x W x D		Adj Shelves	Approv/Lstg Regulation	Sure-Grip® Model No	Ship Wt lb/kg	Extra Shelf Model No		
		Exterior	Interior					w/tray	shelf	tray
4/15	1 door, manual, countertop	22 x 17 x 17 in	18.5 x 13.75 x 13.75 in	1	A9	8904021	63/29	29973	29935	25934
	1 door, self-close, countertop	559 x 432 x 432 mm	470 x 349 x 349 mm			8904221	65/30			
12/45	1 door, manual, compac	35 x 23.25 x 18 in	30.5 x 20 x 14.562 in	1	FM,A9	8912021	121/55	29959	29936	29968
	1 door, self-close, compac	889 x 591 x 457 mm	775 x 508 x 370 mm			8912221	123/56			

Cabinet Replacement Parts

Cabinet Accessories

Add function and convenience with cabinet accessories

Expand storage, add new convenience to existing cabinets, or customize your new cabinet with additional shelves to meet specific workflow needs. Galvanized steel shelves hold up to 350-lb (159-kg) and adjust on 3-in (76-mm) increments for versatile storage.



Shelves for Steel Safety Cabinets

Description	Fits Cabinet Styles	Dimensions W x D	Model No	Ship Wt lb/kg
SpillSlope® steel shelf	For 4 gallon (15 L) cabinet	13.375 x 13 in (340 x 330 mm)	29935	4/2
SpillSlope® steel shelf	12 & 15 gallon (45 L & 57 L) cabinets, 22 Gallon (83 L) Slimline	19.625 x 14 in (498 x 356 mm)	29936	6/3
SpillSlope® steel shelf	30, 40 and 45 Gallon (114 L, 151 L and 170 L) cabinets 17 Gallon (64 L) piggyback and all two door 43 in width (1092 mm width)	39.375 x 14 in (1000 x 356 mm)	29937	10/5
SpillSlope® steel shelf	20 Gallon (76 L) wallmount cabinet	39.375 x 8.625 in (1000 x 219 mm)	29938	7/3
SpillSlope® steel shelf	22 Gallon (83 L) undercounter cabinet	31.56 x 18 in (802 x 457 mm)	29939	10/5
SpillSlope® steel shelf	60 Gallon (227 L) 34 in width (864 mm width) two door cabinet	30.375 x 29 in (768 x 737 mm)	29944	16/7
SpillSlope® steel shelf	90 Gallon (341 L) cabinet	39.375 x 29 in (1000 x 737 mm)	29945	21/9
Steel half-depth shelf	For single 55 Gallon (200 L) vertical drum cabinets	30.375 x 14 in (771 x 356 mm)	29946	8/4
Steel half-depth shelf	For double 55 Gallon (200 L) vertical drum cabinets	55.375 x 14 in (1407 x 356 mm)	29947	18/8

Shelves and Accessories for Nonmetallic Storage Cabinets

Description	Fits Cabinet Styles	Dimensions W x D	Model No	Ship Wt lb/kg
Wooden shelf	24140 cabinet	34 x 16.875 in (864 x 429 mm)	24168	18/8
Wooden shelf	24150 cabinet	40 x 13.875 in (1016 x 352 mm)	24167	19/9
Poly shelf	24160 cabinet	19.625 x 14 in (498 x 356 mm)	24191	1/1
Bottom drain tray		19.625 x 29 in (498 x 737 mm)	24192	
Poly sump tray		12 x 8.5 in (305 x 216 mm)	24193	



Polyethylene Accessories (for Corrosives Cabinets)

Description	Fits Cabinet Styles	Dimensions W x D	Model No	Ship Wt lb/kg
Poly tray for shelf 29935	4 Gallon (15 L) cabinet	13.625 x 13.5 in (346 x 343 mm)	25934	2/1
Poly tray for shelf 29937 (or cabinet sump liner)	30, 40 and 45 Gallon (114 L, 151 L and 170 L) cabinets 17 Gallon (64 L) piggyback and all 2-door	38.75 x 13.5 in (984 x 343 mm)	29962	3/1
Poly tray for shelf 29939	22 Gallon (83 L) undercounter cabinets	31.125 x 18.5 in (791 x 470 mm)	29965	6/3
Poly tray for shelf 29944	60 Gallon (227 L) cabinets	29.75 x 29.5 in (756 x 749 mm)	29961	5/2
Poly tray for cabinet-top	17 Gallon (64 L) piggyback and all 2-door 30, 40 and 45 Gallon (114 L, 151 L and 170 L) cabinets	43.5625 x 18.5625 in (1106 x 471 mm)	25933	6/3
Poly tray for shelf 29936 (or cabinet sump liner)	12 & 15 Gallon (45 L & 57 L) cabinets and 22 Gallon (83 L) Slimline cabinets	18.5 x 13.875 in (470 x 352 mm)	29968	3/1

Additional Cabinet Accessories

Description	Dimensions W x D	Model No	Ship Wt kg
Wall hanger assembly (mounting kit) for 4 Gallon (15 L) compac cabinets	—	25951	4/2
Wall hanger assembly (mounting kit) for 12 & 17 Gallon (45 L & 64 L) piggyback cabinets		25950	5/2
Padlock Master Lock® No. 5	Shackle 10 mm	29933	2/1

for Corrosives

Polyethylene Acid Cabinets

One-piece construction provides excellent resistance to harsh acids and corrosives

These blue, hollow-bodied, polyethylene cabinets withstand highly corrosive acids and offer maximum protection against chemical corrosion and leaks. Both models are clearly labeled for ACID contents and accept a padlock (not included) for added security.

Countertop Cabinet stores up to two 1-quart (4-L) bottles. Door can be hinged from either side for best worktop space utilization. Polyethylene spill tray inside contains leaks and can be removed for easy cleaning. A separate polyethylene tray stores under the cabinet and can be used as a handy work tray.

Undercounter Cabinet holds up to thirty 1-quart (4-L) containers. Two segregated compartments each with an adjustable shelf let you store a variety of containers while recessed area in both doors hold small containers. Two removable sumps slide out for easy cleaning of incidental spills. Two vent holes (with removable caps) at rear accommodate pressurized vapor removal systems.



Store harsh acids under a counter for safe, convenient access.

Free expert advice . . .

Learn more about handling flammables and corrosives by visiting justritemfg.com. You'll find our RedBook guide, videos, TechTalks and more.



Compact design offers placement on lab counters for access to frequently used chemicals.



24040

24160

Capacity	Number of Doors and Style	Exterior Dimensions H x W x D	Adjustable Shelves	Model No	Ship Wt lb/kg
Two, 4-liter bottles	1 door, countertop	19.5 x 14.25 x 16.25 in 495 x 362 x 413 mm	–	24040	31/14
Thirty, 1-liter bottles	2 door, undercounter	35 x 36 x 23.5 in 889 x 914 x 597 mm	2	24160	130/59

for Corrosives

Wood Laminate Acid Cabinets

Durable and highly chemical-resistant

Safely store highly corrosive liquids such as phenol, nitric acid and sulfuric acid in these wood laminate storage cabinets. Long lasting wood construction along with stainless steel handles and hinges provide exceptional resistance to corrosion from harsh acids. Shelf adjusts on 1-1/4-in (32-mm) centers to accommodate a wide variety of containers. Cabinets include adjustable leg levelers, Haz-Alert™ reflective labels, and double key set for safety and security.

Countertop model 24120 is ideal for smaller quantities used at workbench level. Use the undercounter model 24140 as a free standing piece. It includes a removable, easy-to-clean polyethylene work surface top that is recessed 5/8-in (16-mm) to help contain incidental leaks.



24140

Capacity	Number of Doors and Style	Dimensions H x W x D		Adjustable Shelves	Model No	WHS	Ship Wt lb/kg
		Exterior	Interior				
Six, 2.5 liter bottles	2 door, countertop	18.5 x 24 x 16 in 470 x 610 x 406 mm	17 x 22.488 x 15.228 in 432 x 571 x 387 mm	0	24120	-	52/24
Thirty-six, 2.5 liter bottles	2 door, stand alone	35.75 x 36 x 22 in 908 x 914 x 559 mm	29.496 x 34.488 x 20.858 in 749 x 876 x 530 mm	1	24140		181/82
Forty-nine, 2.5 liter bottles		60 x 42 x 17.875 in 1524 x 1067 x 454 mm	54.511 x 40.488 x 17.118 in 1385 x 1028 x 435 mm		24150		276/125

Note #24140 Height dimension includes 0.75-in (19-mm) top. For undercounter usage, remove top for 22-in (559-mm) depth and adjust leg levelers which extend up to 0.75-in (19-mm).

Solid Polyethylene Acid Cabinets

Sturdy, smooth construction in an attractive design

- Suitable for highly aggressive liquids—no metal parts to corrode.
- Three-point door latch on larger units offers secure closure and vapor control.
- Toe kick on undercounter model allows user to stand closer to counter—less leaning, better ergonomics.



24015

Solid polyethylene white acid cabinets have excellent chemical resistance to handle the most corrosive chemicals. A protective, all-welded bottom sump and a clean, sleek design complement any laboratory setting. Fully welded, liquid-tight 2-in (51-mm) sump contains accidental spills and makes clean up a snap. Shelf on larger units adjusts on 3-in (76-mm) center. Door accepts a padlock for security.

Capacity	Number of Doors and Style	Dimensions H x W x D		Adjustable Shelves	Model No	Ship Wt lb/kg
		Exterior	Interior			
Six, 2.5 liter bottles	1 door, countertop	22 x 17 x 17 in 559 x 432 x 432 mm	21.5 x 16.5 x 16.25 in 546 x 419 x 413 mm	-	24004	26/12
Thirty-six, 2.5-liter bottles	2 door, undercounter	35.75 x 36 x 21.75 in 908 x 914 x 552 mm	35.25 x 35.5 x 20.875 in 895 x 902 x 530 mm	1	24010	160/73
Thirty-six, 2.5-liter bottles	2 door, stand alone	36.75 x 36 x 21.75 in 933 x 914 x 552 mm	35.5 x 35.5 x 20.875 in 902 x 902 x 530 mm		24015	

for Flammables

Outdoor Safety Lockers—Non-Combustible **NEW**

Safe, secure storage for flammables and hazardous chemicals

- Leakproof, all welded sump with galvanized steel grate flooring.
- 42-in (1.07-m) wide steel door system with 3-point lock.
- Chemical and UV resistant coating, inside and out.


Protect people and the environment and meet insurance requirements by storing hazardous materials in rugged, FM-approved Outdoor Safety Lockers. Non-combustible construction with heavy gauge steel and built-in secondary containment, every locker is fully compliant to meet EPA 40 CFR, NFPA 30 and NFPA 1 regulations. Proper chemical storage reduces poison hazards and accidents, minimizes contamination of chemicals, and prevents unwanted, costly fines.

Each locker features natural draft ventilation, NFPA 704 diamond decal for content identification, anchoring plates for hold down protection, and multiple static grounding connections for maximum safety. Forklift channels permit easy relocation.

Choose explosion relief panels for the storage of highly volatile Class 1A or dispensing of Class 1 A and 1B flammables as defined by NFPA – always check with the local authority having jurisdiction to ensure safety by following all local regulations, including proper setback requirements.



Sixteen-drum locker with optional steel ramp simplifies drum loading.



1. Air vents on both sides
2. Inside grounding lug
3. Leakproof sump with removable, galvanized steel grate floor
4. High visibility safety strip
5. Forklift channels
6. 3-point latching system
7. Outside grounding lug and anchor plate
8. Explosion relief design with blow-out panels



For added convenience and safety . . . Include ramp, shelving, grounding kit, fire protection and more – see page 62 for optional accessories.

NON-COMBUSTIBLE OUTDOOR SAFETY LOCKERS



55-Gal Drum Capacity	Sump Capacity Gallons/Liters	Dimensions W x D x H		Approval/Lstg Regulation	Standard		Explosion Relief	
		Exterior*	Interior		Model No	Ship Wt lb/kg	Model No	Ship Wt lb/kg
2	120/454	67 in x 38 in x 75 in 1702 mm x 965 mm x 1905 mm	54 in x 30 in x 55.5 in 1372 mm x 762 mm x 1410 mm	FM,N,A,E	911020	982/445	911021	1069/485
4	100/379	67 in x 62 in x 75 in 1702 mm x 1575 mm x 1905 mm	54 in x 54 in x 62 in 1372 mm x 1372 mm x 1575 mm		911040	1341/608	911041	1428/648
6	140/530	91 in x 62 in x 97 in 2311 mm x 1575 mm x 2464 mm	78 in x 54 in x 84 in 1981 mm x 1372 mm x 2134 mm		911060	1658/752	911061	1745/792
9	198/750	91 in x 86 in x 97 in 2311 mm x 2184 mm x 2464 mm	78 in x 78 in x 84 in 1981 mm x 1981 mm x 2134 mm		911090	2101/953	911091	2203/999
12	253/958	84 in x 115 in x 97 in 2134 mm x 2921 mm x 2464 mm	78 in x 102 in x 84 in 1981 mm x 2591 mm x 2134 mm		911120	2442/1108	911121	2616/1187
16	326/1234	115 in x 110 in x 97 in 2921 mm x 2794 mm x 2464 mm	102 in x 102 in x 84 in 2591 mm x 2591 mm x 2134 mm		911160	2959/1342	911161	3126/1418

Note: Door height on 2- and 4-drum models is 51-in (1.30-m) high and 80-in (2.03-m) high on 6- through 16-drum models. *Dimensions include mounting plates and door hardware. In most instances, locker sizes 2- through 6-drum are available to ship via a closed container truck, which can potentially reduce freight costs as compared to flat bed shipping alternatives.

OUTDOOR SAFETY LOCKERS

Accessories for Outdoor Lockers

Outdoor Safety Lockers – Optional Accessories **NEW**

Accessorize your non-combustible locker with options that improve function and add convenience

Customize your locker to meet specific applications with a variety of optional features and accessories designed to meet code and increase safety.

- Add sturdy steel ramps to simplify loading or unloading heavy drums with a drum dolly.
- Add galvanized steel shelving for organized, easy access to smaller containers.
- Add fiberglass grate flooring with poly sump liner for greater resistance against corrosive chemical spills.



Loading Ramp

Steel with anti-skid yellow paint

- **Model 915001:**
48-in (1219-mm) W x 120-in (3048-mm) L
- **Model 915003:**
48-in (1219-mm) W x 88-in (2235-mm) L



Grounding Kit

Model 915505

Kit comes with rod – 5/8-in (16-mm) diameter x 8-ft (2438-mm) L, wire and connector



Fiberglass Grate with Sump Liner

Models 915201 - 915211

High density polyethylene (HDPE) sump liner and fiberglass grate flooring for acid and corrosive chemical spill resistance



Shelving

Models 915101 - 915105

Galvanized steel shelving. Two-tier, 16-in (406-mm) wide with mounting brackets—back wall only

Not available on locker models with explosion relief panels. Shelf package for 2- and 4-drum models (915101) will limit the ability to load locker to full drum capacity.



Basic Fire Protection System

Models 915401 Model 915403

BC Type, FE-227 extinguisher unit, ceiling mounted and fuse linked

Locker Capacity	Grounding Kit		Loading Ramp		Galvanized Steel* Shelving - 2 Tier		Fiberglass† Grate Flooring (with Sump Liner)		Basic Fire† Protection System			
	Model No	Weight lb/kg	Model No	Weight lb/kg	Model No	Weight lb/kg	Model No	Weight lb/kg	Model No	Weight lb/kg		
2-drum	915505	10/5	915001	300/136	915101	69/29	—	—	915401	12/5		
4-drum												
6-drum			915003	225/102	915103	86/39			915201	915203	915403	35/16
9-drum												
12-drum												
16-drum												

† These accessories must be purchased in conjunction with a locker to ensure proper installation and to retain FM approval.

* Shelving is not available on models with explosion relief panels. Shelf package for 2- and 4-drum models (915101) will limit the ability to load locker to full capacity.

Justrite's full line of Outdoor Safety Lockers—visit our website for details.

NON-COMBUSTIBLE
OUTDOOR SAFETY LOCKERS

AGRI-TURF™
OUTDOOR SAFETY LOCKERS

2 HOUR FIRE-RATED
OUTDOOR SAFETY LOCKERS

4 HOUR FIRE-RATED
OUTDOOR SAFETY LOCKERS



Warehouse Shipping Locations

Illinois

Justrite Warehouse
3501 Justrite Drive
Mattoon, IL 61938
Tel: 1-217-234-7350
Fax: 1-217-234-3160

California

Western Safety Associates
267 Winfield Circle
Corona, CA 92880
Tel: 1-951-371-8685
Fax: 1-951-371-2496

Washington

Tucker-Weitzel & Assoc., Inc.
230 S. Austin Street
Seattle, WA 98108
Tel: 1-206-763-3690
Fax: 1-206-763-3797

North Carolina

Justrite Southeast Distribution Ctr.
1804 River Street
Wilkesboro, NC 28697
Tel: 1-800-798-9250
Fax: 1-800-488-5877

China (Mainland)

Justrite China
Wuxi, China
Tel: 011+86-400-812-1906
internationalcs@justritemfg.com

China (Outside Mainland)

Justrite Asia
Zhuhai, China
Tel: 011+86-756-322-9909
internationalcs@justritemfg.com

United Kingdom

Justrite U.K.
Stockport, United Kingdom
Tel: 0800 0939975
ukinfo@justritemfg.com

Europe

Justrite Europe
Duesseldorf, Germany
Tel: 1-217-238-5091
internationalcs@justritemfg.com

Operations - U.S.A.

Justrite Manufacturing Company, L.L.C.
3921 DeWitt Avenue
Mattoon, IL 61938 U.S.A.

*Manufacturing, Finance (billings),
Purchasing, Information Technology &
Human Resources*

Tel: 1-217-234-7486 Fax: 1-217-234-7632

Corporate - U.S.A.

Justrite Manufacturing Company, L.L.C.
2454 Dempster Street
Des Plaines, IL 60016 U.S.A.

Sales, Marketing & Administrative

Tel: 1-847-298-9250 Fax: 1-847-298-9261

Operations - China

Justrite Safety Technology (Wuxi) Co., Ltd.
Room 502, Building B,
A-Park Technology & Business Center,
#35 South Changjiang Road, Wuxi 214028, China

Tel: 011+86-400-812-1906
Fax: 011+86-510-85305038

Customer Service North America

Tel: 1-800-798-9250 Fax: 1-800-488-5877
custserv@justritemfg.com

Return shipments must be authorized. Call customer service for RMA form.

Customer Service International

Tel: 1-217-234-7494 Fax: 1-217-234-7420
internationalcs@justritemfg.com

Justrite Limited Warranty

1 Year
Limited Warranty

All Justrite products shown in this Justrite Catalog are covered by a Limited Warranty against defects in materials and workmanship for a period of one year, or as otherwise currently advertised, from date of purchase.

The Warranty is limited to the replacement of products. Warranty does not apply to any products which have been subject to any misuse, including but not limited to products used with materials (primarily liquids) that are not recommended by the manufacturer in instructions furnished with the product or in published product descriptions; products which have been altered in any way by the user or used in a manner inconsistent with their intended use; products which have been subjected to severe treatment (undue pressure against movable parts, exposure to severe weather, dropping, etc.) not reasonably associated with "ordinary" usage. THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL JUSTRITE BE LIABLE FOR ANY LOSS OF PROFITS OR ANY INDIRECT OR CONSEQUENTIAL DAMAGES ARISING OUT OF ANY SUCH DEFECT IN MATERIAL OR WORKMANSHIP.

5 Year
Limited Warranty

The following Justrite products are also covered by a Limited Warranty against weathering and ultraviolet (UV) degradation caused by exposure to natural sunlight for a period of five years from the date of purchase: Rigid-Lock QuickBerm® Plus, Rigid-Lock QuickBerm®

10 Year
Limited Warranty

The following Justrite products are covered by a Limited Warranty against defects in materials and workmanship for a period of ten years from date of purchase: Sure-Grip® EX Safety Cabinets, Metal Type I and Type II Safety Cans, Oily Waste Cans, Plunger Cans and Bench Cans

15 Year
Structural Warranty

The following Justrite products are covered by a fifteen-year Limited Warranty against structural defects and a one-year Limited Warranty against defects in workmanship and materials: Outdoor Safety Lockers. Locker accessories not manufactured by Justrite are warranted against defects according to the original manufacturer's warranty.

Justrite and Chemical Compatibility

Because of the complex nature of chemicals, Justrite cannot offer specific recommendations on chemical compatibility. Your chemical supplier, MSDS sheets, or other expert sources should be consulted. To aid in your decision process to select the appropriate Justrite product for your application, contact Justrite Customer Service to obtain sample material parts for you to test with the chemicals you are using. Justrite makes no guarantee of results and assumes no obligation or liability in connection with the use of these products and their application relative to their chemical compatibility. It is the end user's sole responsibility to determine the nature of the materials to be contained and to select the proper product suitable for a particular application. Furthermore, it is the end user's responsibility to insure that the product selected is suitable for its intended use. **JUSTRITE MAKES NO WARRANTY, EXPRESSED OR IMPLIED OF MERCHANTABILITY OR FITNESS FOR PURPOSE**, and assumes no liability in connection with any product made or sold by Justrite with regard to its use or chemical compatibility.

Justrite Printed Catalog

Warranty Disclaimer: Justrite has made a diligent effort to illustrate and describe the products in this catalog accurately; however, such illustrations and descriptions are for the sole purpose of identification, and do not express or imply a warranty that the products are MERCHANTABILITY, or FIT FOR A PARTICULAR PURPOSE, or that the products will necessarily conform to the illustrations or descriptions. Always check for product specifications prior to purchase. No warranty or affirmation of fact, express or implied, other than as set forth in the limited warranty statement above is made or authorized by Justrite. Justrite reserves the right to correct publishing errors.

Note: Justrite metric equivalents may be inconsistently noted. Capacities shown may be nominal because some products may hold more than listed to accommodate manufacturing tolerances and expansion, as well as others are designed to accommodate additives which is a common practice with safety can usage. Additionally, "rounding" may occur to simplify data or where catalog space is restrictive. In other cases nominal capacities have simply become accepted "industry practice" over the last 100 years since Justrite has been in business.

Shipping weights are approximate and are subject to change.



JUSTRITE
justritemfg.com



JUSTRITE®

A SAFER TOMORROW

More than a products company, Justrite's commitment extends to a variety of services that help support our mission to protect people, property, and the environment from potential harm when handling flammable and hazardous materials. Beyond safety, we also pledge to support our distributor partners through our Customer Access Network, putting valuable information at their fingertips to help gain efficiencies in their business. To learn more about our services, visit our website at justritemfg.com.

EXPERT INFO



As a manufacturer and expert in flammable liquid safety, Justrite welcomes the opportunity to serve those who desire additional training and information that ensures on-going development in areas of knowledge and products for a safer tomorrow.

CUSTOM DESIGN



Photo courtesy of Honeywell




Every facility has applications or safety requirements simply not met by off-the-shelf solutions. For that reason, Justrite custom builds spill berms, safety cabinets, and HPLC safety cans—as well as offers custom colors for some products. Whatever the requirement or special need, we stand ready to design and manufacture a solution that meets and exceeds the challenging request.

STUD-E™

Storage, Transfer, Use, Disposal, Evaluation of Hazardous Liquids

Justrite's free consultative safety survey, provided in a comprehensive format—known as **STUD-E™** for **STORAGE**, **TRANSFER**, **USE**, **DISPOSAL**, and **EVALUATION** of flammable liquids—addresses the inherent concerns with handling volatile hazardous liquids. The results prevent catastrophic fires, protect your people from potential injuries or death, protect the environment to meet sustainability initiatives, and assure compliance to OSHA and EPA regulations. This makes your job easier and more productive. Recognized as a vital part of environmental, health, and safety programs by businesses worldwide, Justrite brings the STUD-E™ backed by over 100 years of experience. Put our expertise to work for you to improve your overall safety program.

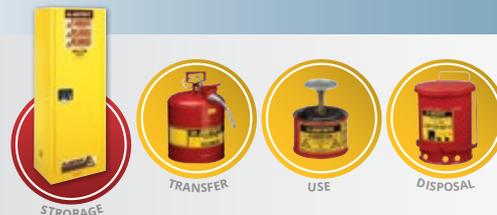

- ✓ Pricing
- ✓ Product Availability
- ✓ Order Placement
- ✓ Order Status
- ✓ Freight Quotes
- ✓ Shipping Info
- ✓ Product Info

For Justrite® Authorized Distributors

GET ANSWERS 24/7

Sign-up today and call Customer Service at 1-217-234-7494 (in North America 1-800-798-9250) for your I.D. and password, or visit our website and click on "Distributor Log-In" at top right corner and send us an email via "Contact Us."